

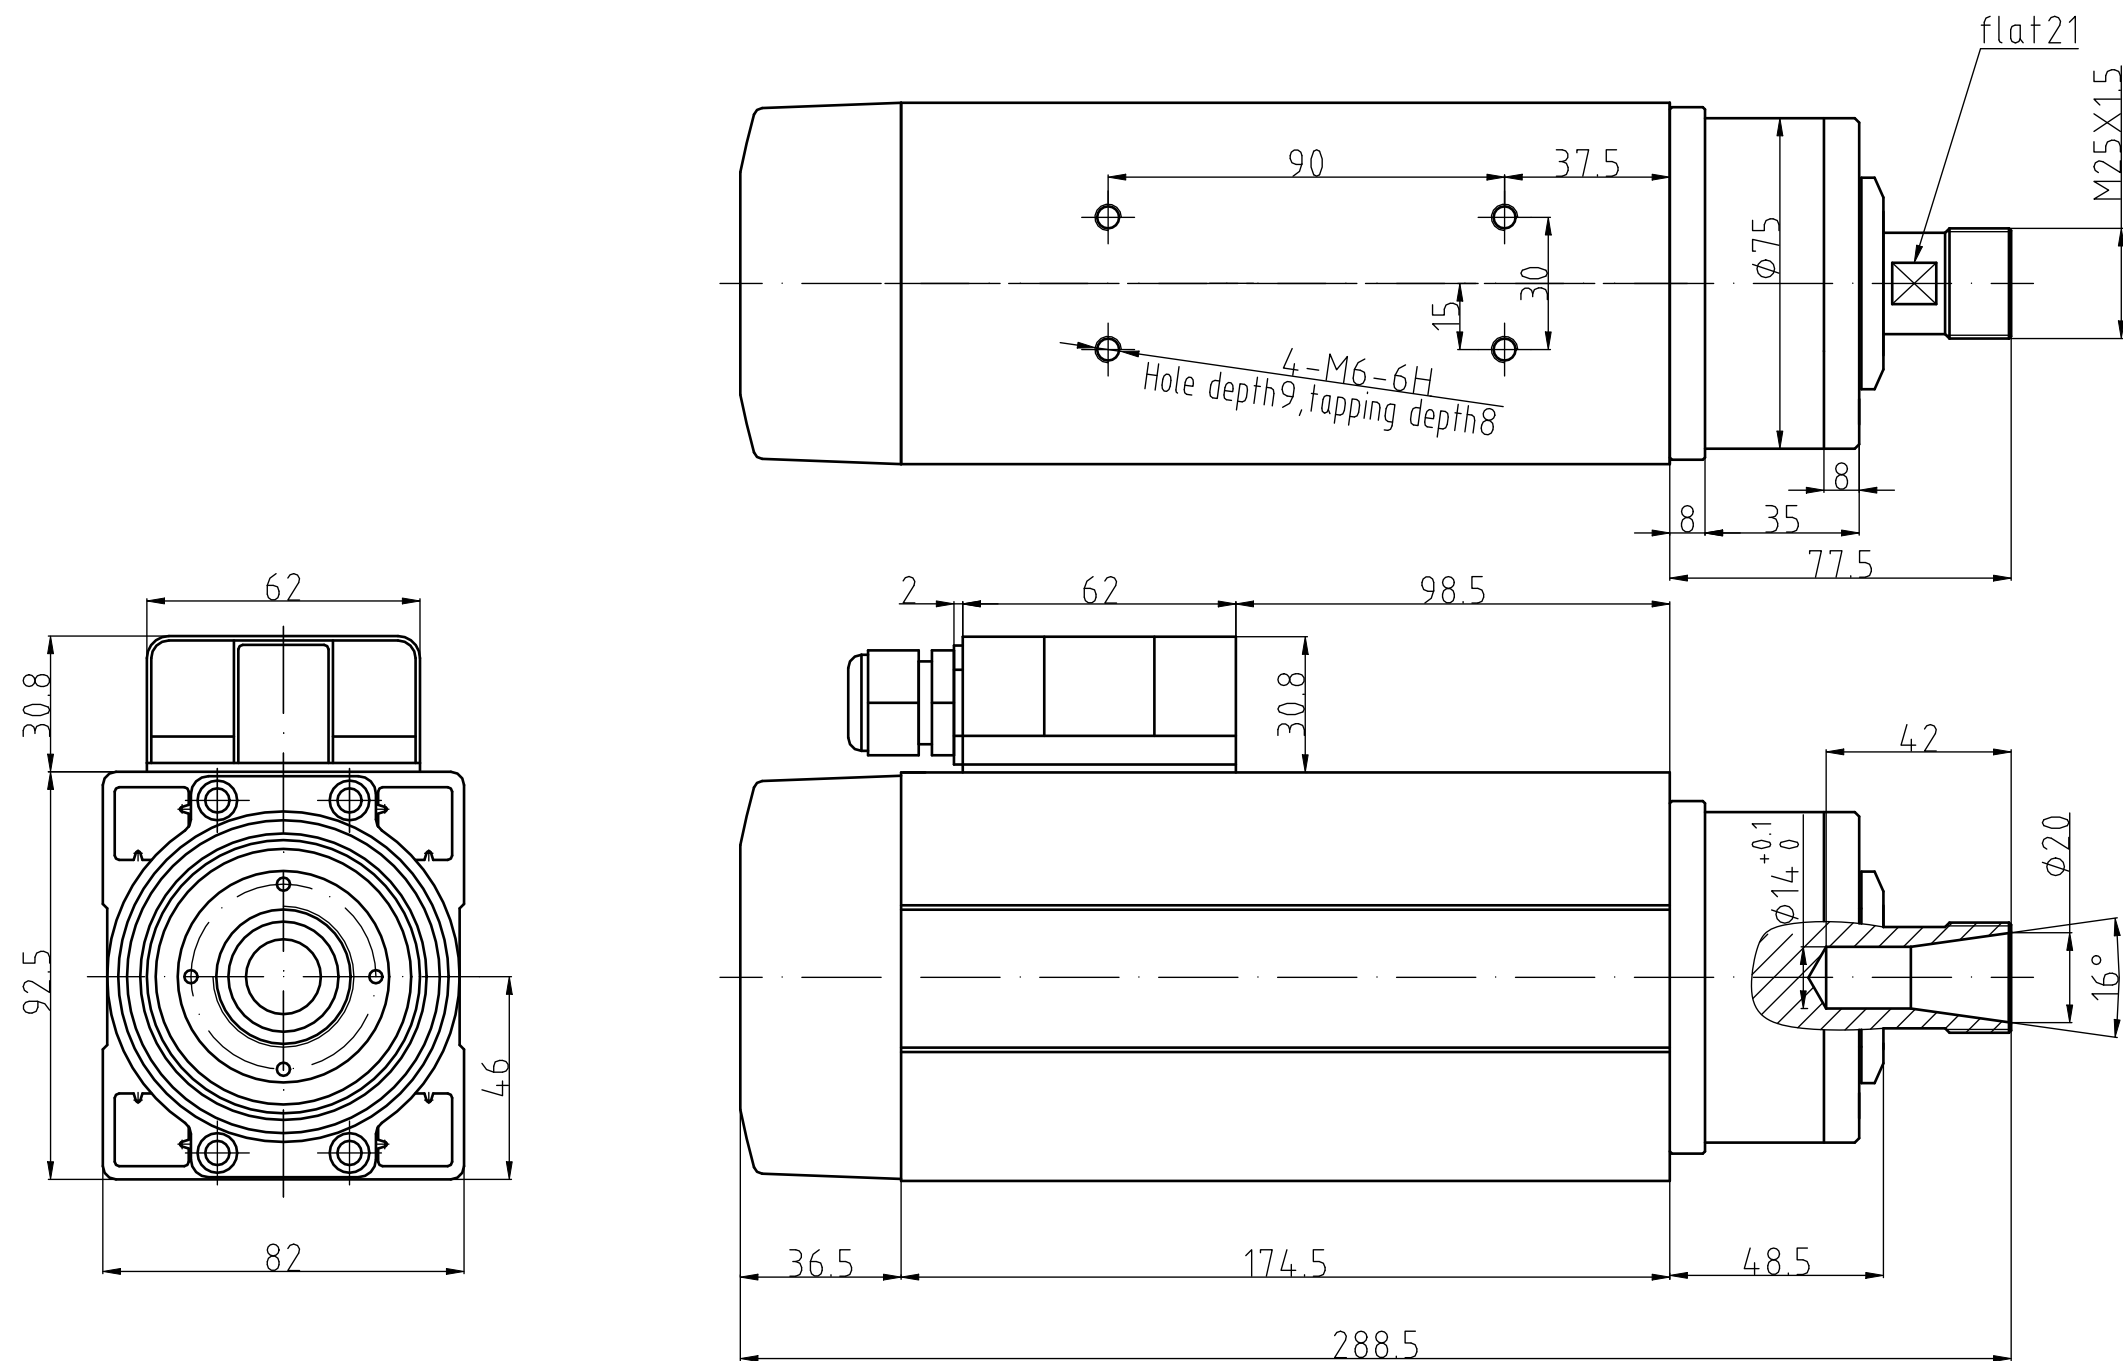


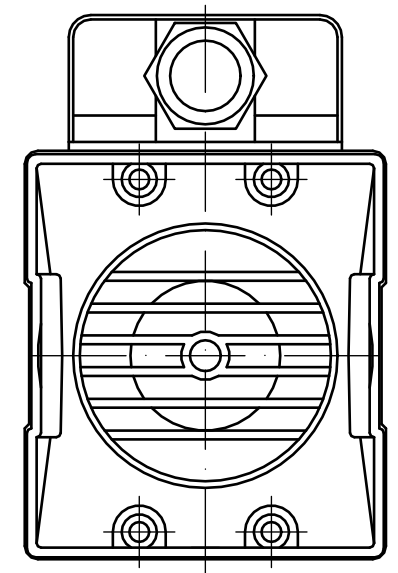

Wiring illustration

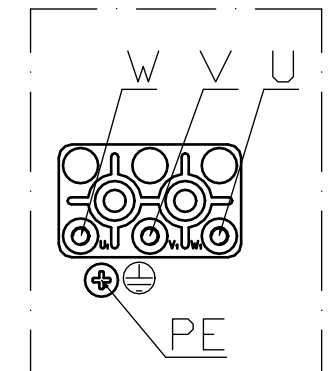

GDF46-18Z/2.2

Power 2.2kw

Voltage 380V

Current 4.4A

Frequency 300Hz

Rotational speed 18000r/min

Weight:7KG

ER Nut: ER20

Cooling method: Air cooling

Lubrication method of bearings:grease lubrication

Angular contact ball bearing with high precision:

2X7005C P4/1X6002V P5

Rotation direction:Counterclockwise viewed from the shaft extension

Notice:It shall apply thread adhesive or spring washer to prevent loosening while mounting fastening screw!