

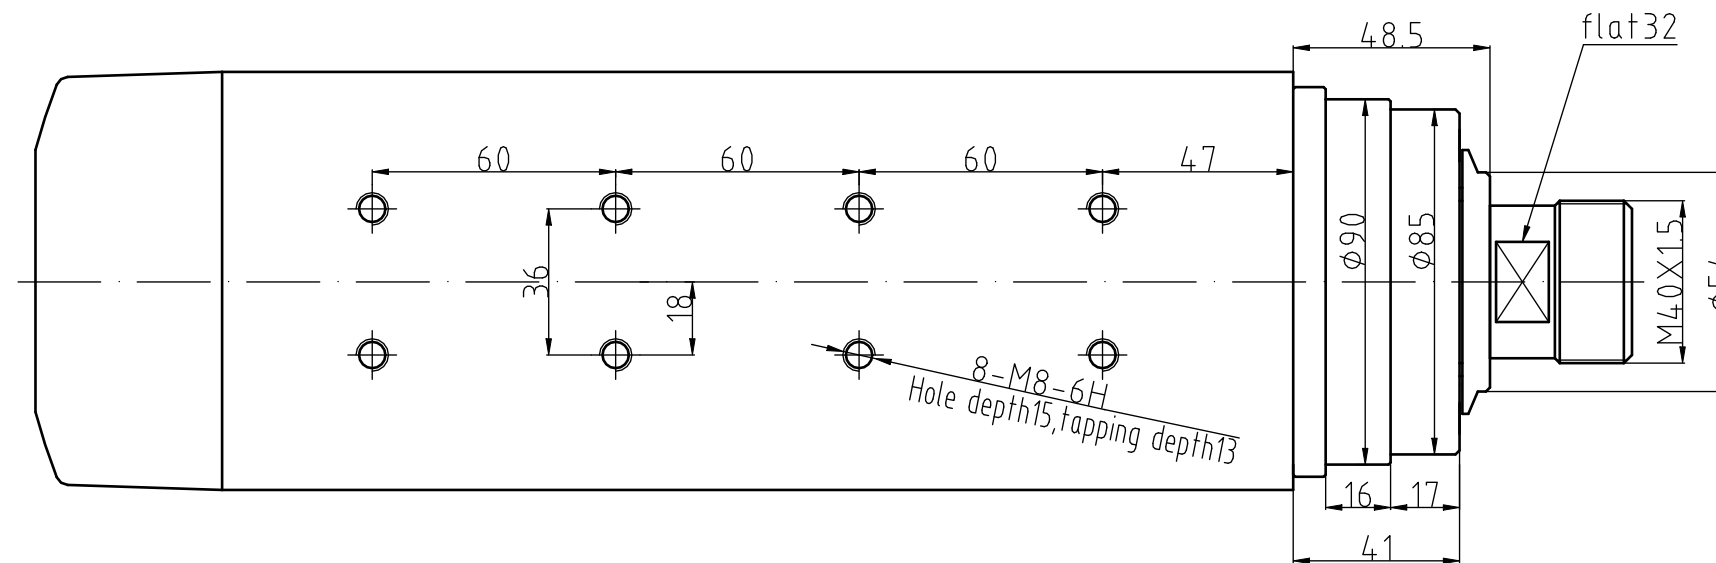
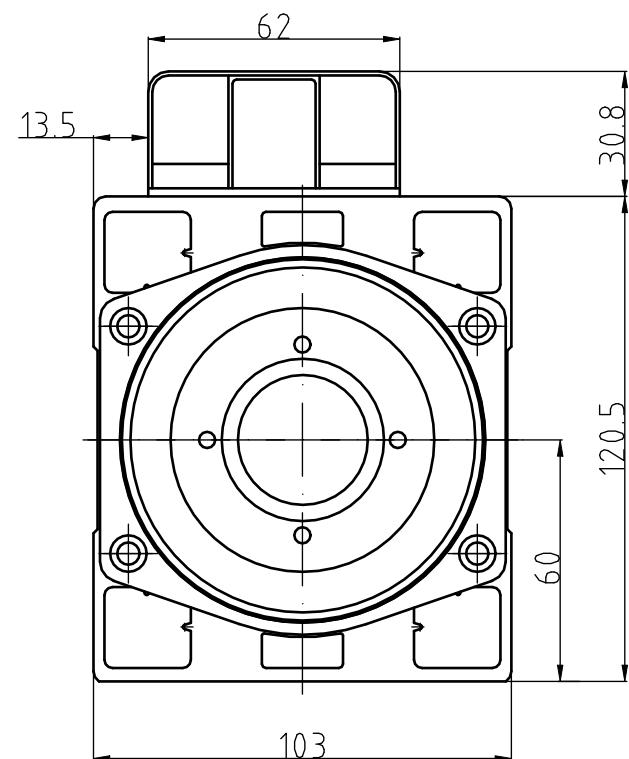
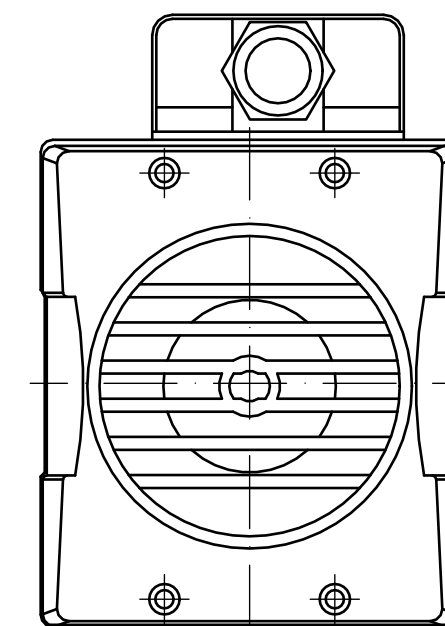


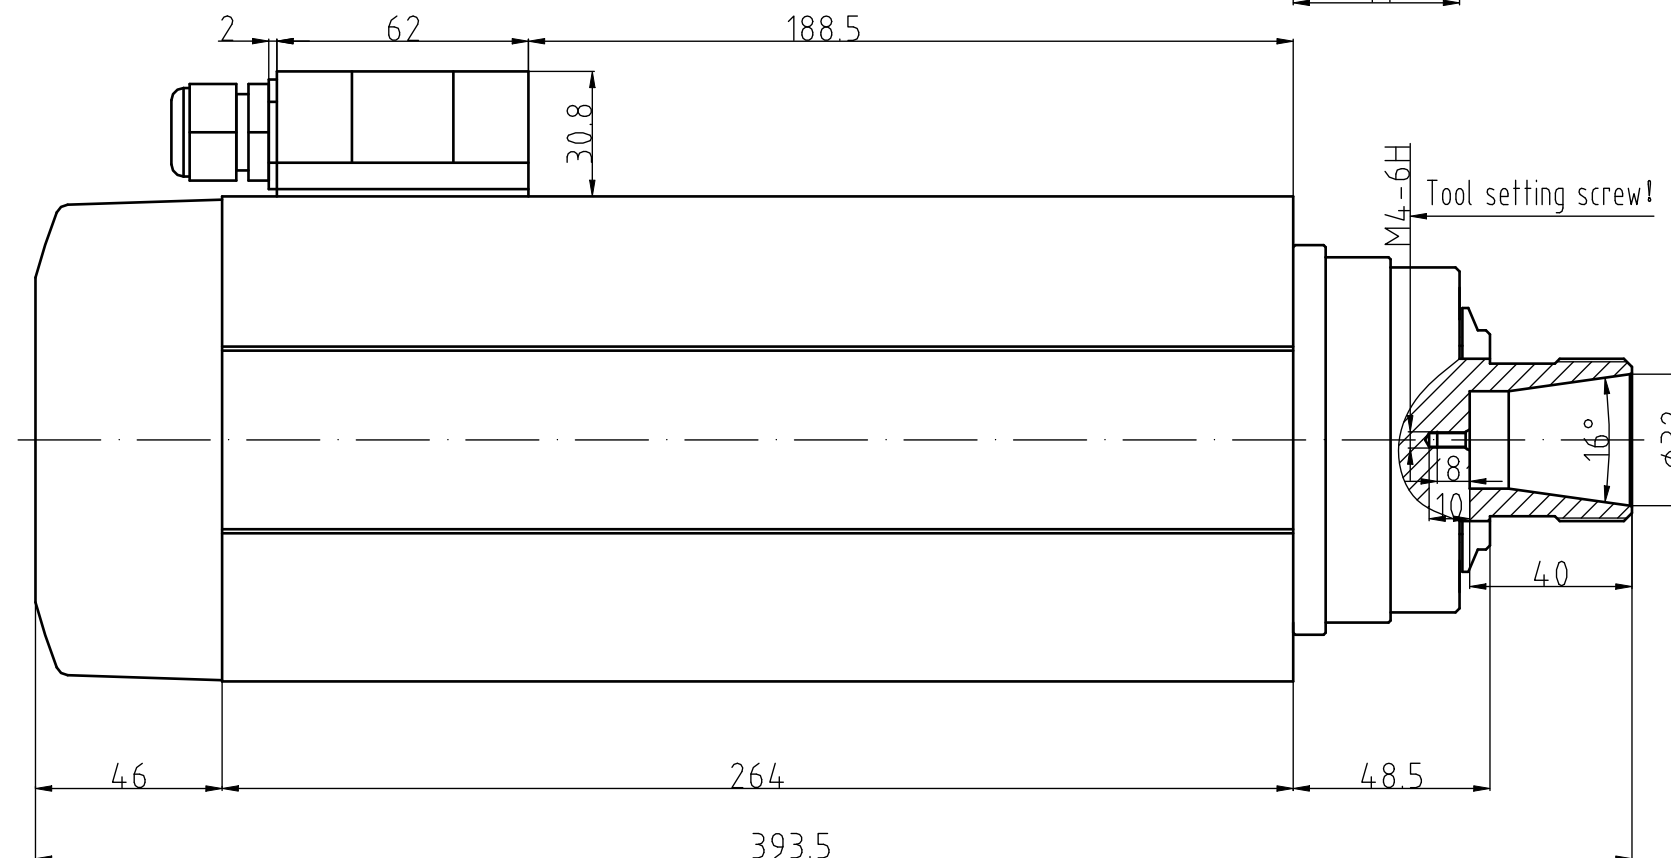

Wiring illustration

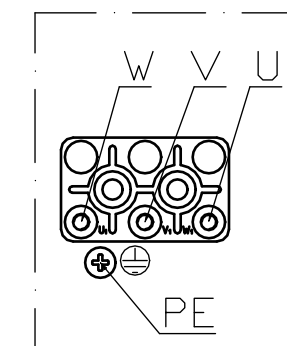

GDF60-18Z/7.5

Power 7.5kw

Voltage 220V

Current 26.0A

Frequency 300Hz

Rotational speed 18000r/min

Weight:16KG

ER Nut: ER32

Cooling method: Air cooling

Lubrication method of bearings:grease lubrication

Angular contact ball bearing with high precision:

2X7008C P4/2X7003C P4

Rotation direction:Counterclockwise viewed from the shaft extension

Notice:It shall apply thread adhesive or spring washer to prevent loosening while mounting fastening screw!