
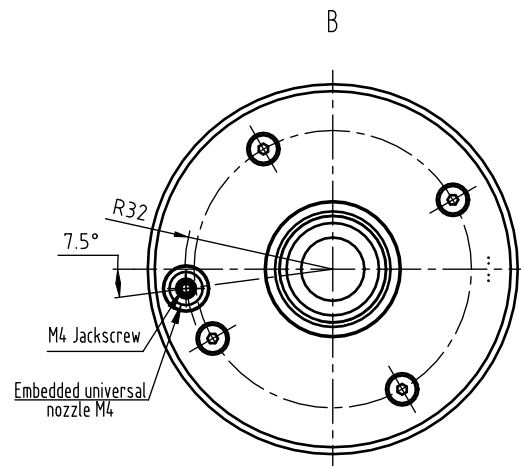
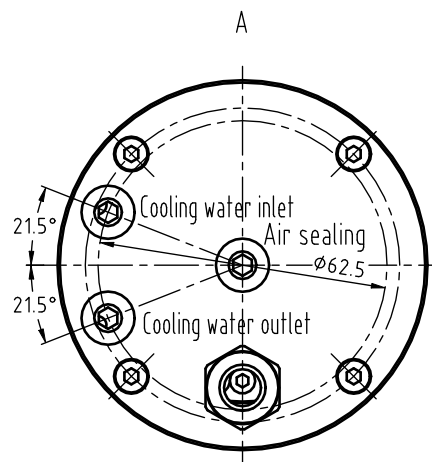


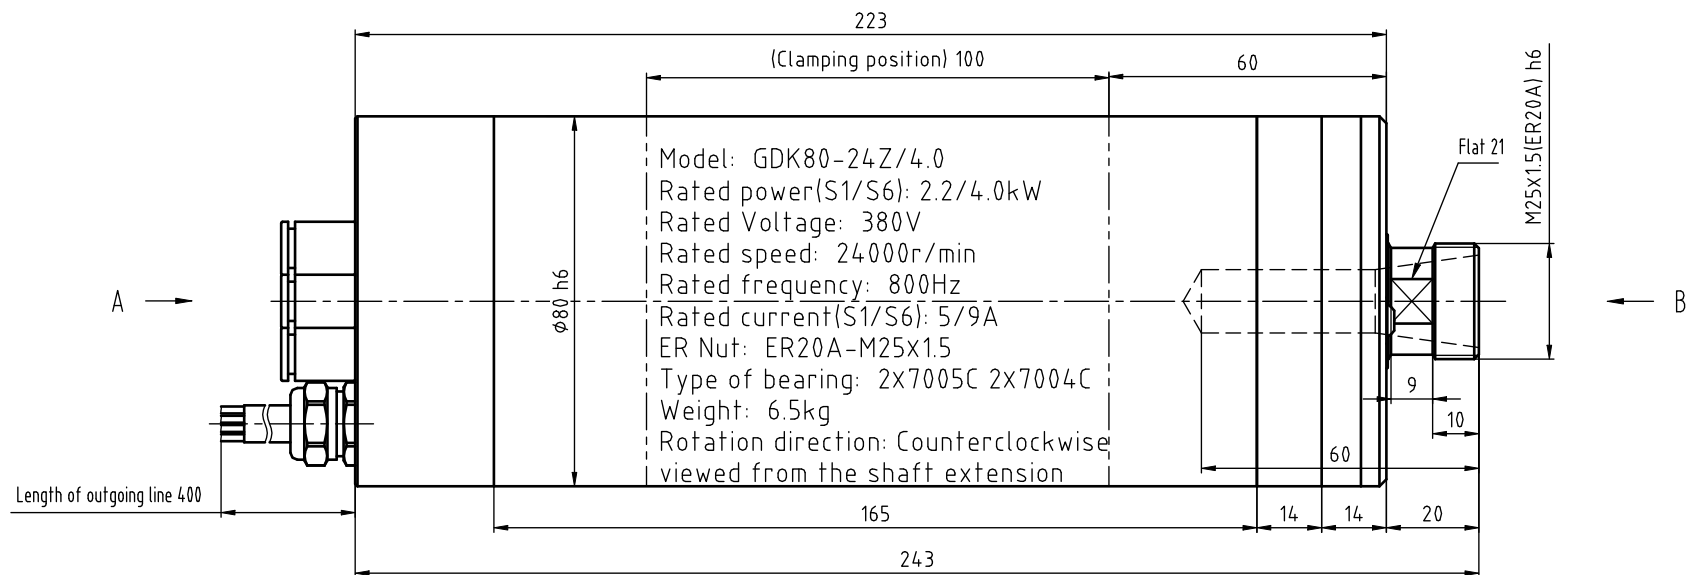

Interface Description

1. Power: Tricolor U, V, W phase/yellow green ground wire
 2. Cooling water inlet: delivery of water pump head 12m (connected with 6/4 hose)
 3. Cooling water outlet: (connected with 6/4 hose)
 4. Air sealing: Pressure 0.4MPa (connected with 6/4 hose)
- Note: 1. To use this main spindle, it is necessary to connect to the air seal!
2. Connect the front-end embedded nozzle to the cooling circuit. If necessary, remove the M4 jackscrew installed on the nozzle.

						Jiangsu HQD Spindle Motor Co., Ltd.		
Marks	Number of places	Zoning	Modified document number	Signature	Date	Phase mark Weight Scale		
Designed by			Standardized by					
Reviewed by						Total page(s) Page		
Processed by			Approved by					
						Profile Drawing		
						GDK80-24Z/4.0-00-1		