

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A






B

C

D

E

F

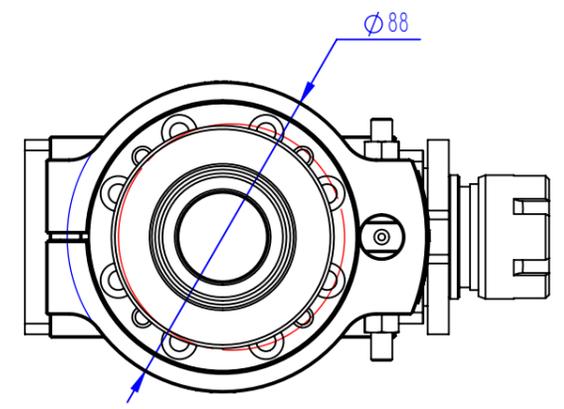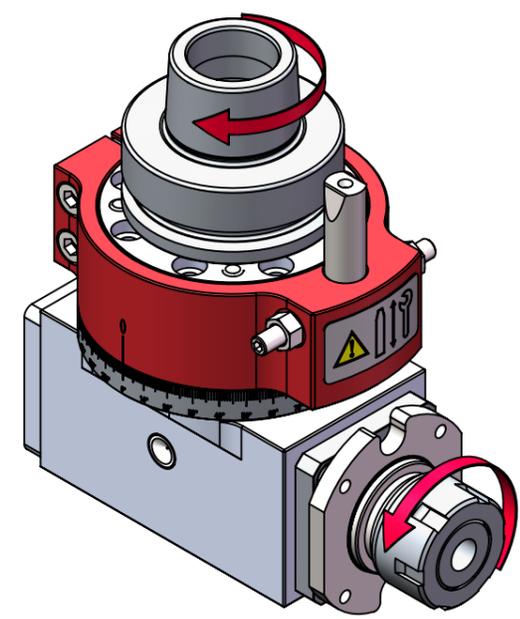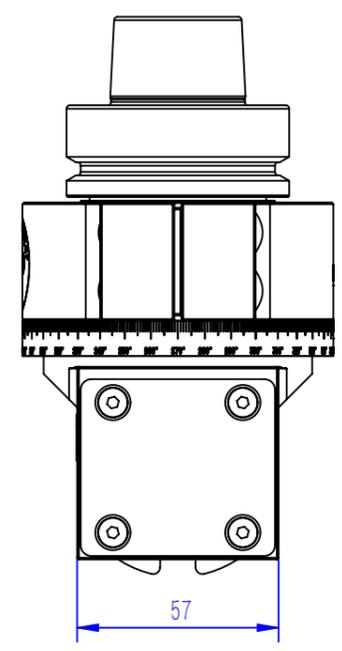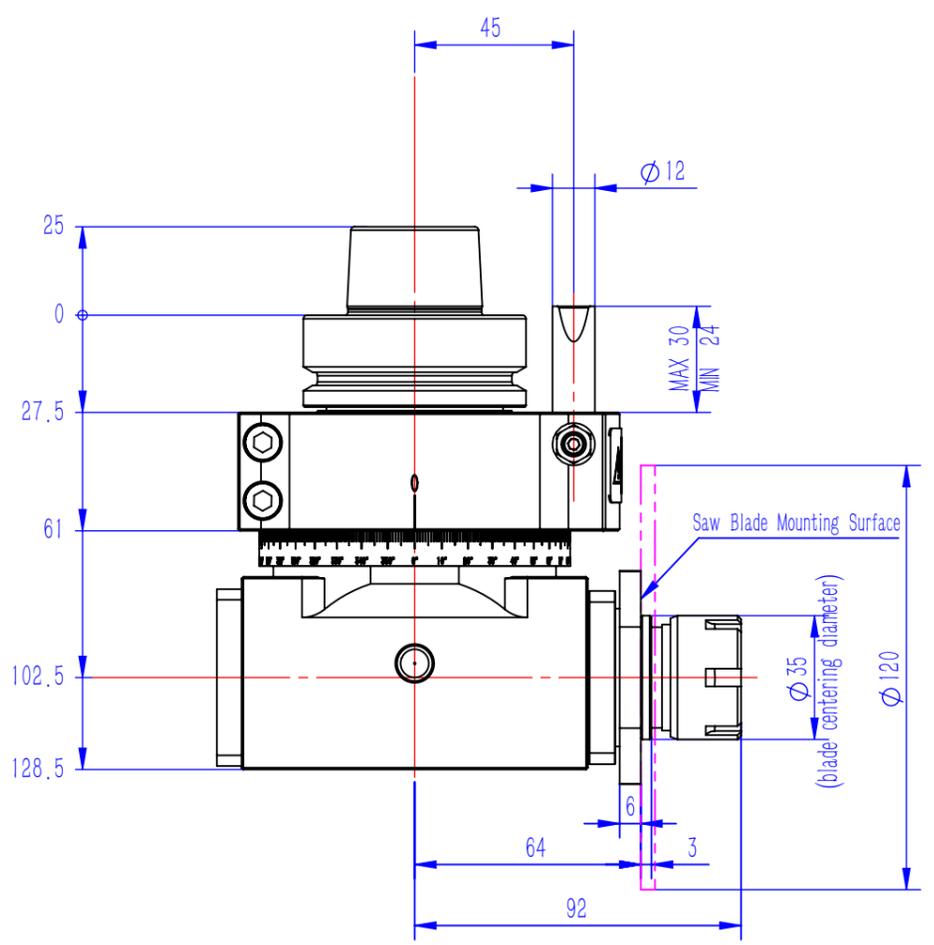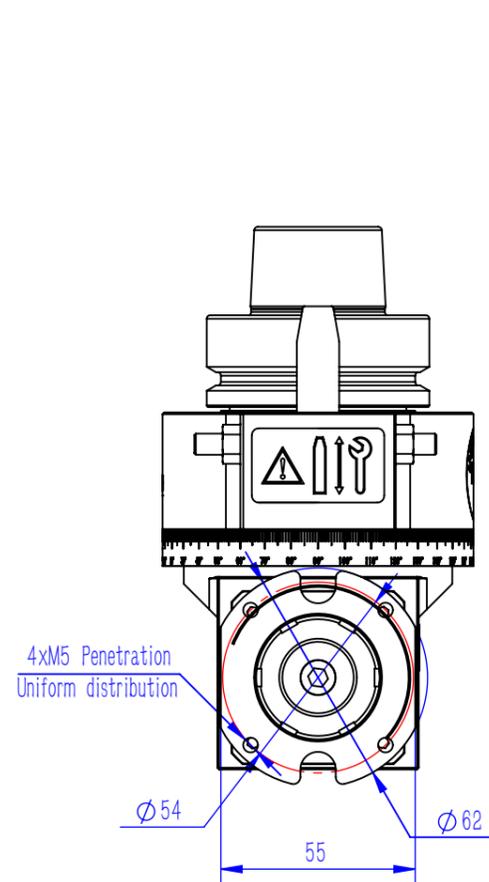

| Technical parameters | |
|----------------------|---|
| Input maximum speed | 8400rpm (The maximum speed when using the saw blade is 4200 rpm) |
| Output maximum speed | 12000rpm (The maximum speed when using the saw blade is 6000 rpm) |
| Reduction ratio | 1: 1.43 |
| Tool Holder | HSK63F |
| Output shaft | ER25, One side can be fitted with a saw blade |
| Lubricating method | Grease lubrication |

| | | | | | | | | | |
|------|----|----|-------|----|-----|-------------------------------------|-------|--------|--|
| | | | | | | Jiangsu HQD Spindle Motor Co., Ltd. | | | |
| 标记 | 处数 | 分区 | 更改文件号 | 签名 | 年月日 | 阶段标记 | 重量 | 比例 | Angle head HSK63F-ER25 (With saw blade) |
| 设计 | | | 标准化 | | | | | 1:2 | |
| 校核 | | | 工艺 | | | | | | JD11H10A |
| 主管设计 | | | 审核 | | | | | | |
| | | | 批准 | | | 共 1 张 | 第 1 张 | 版本 V01 | 替代 |

1 2 3 4 5 6 7 8