


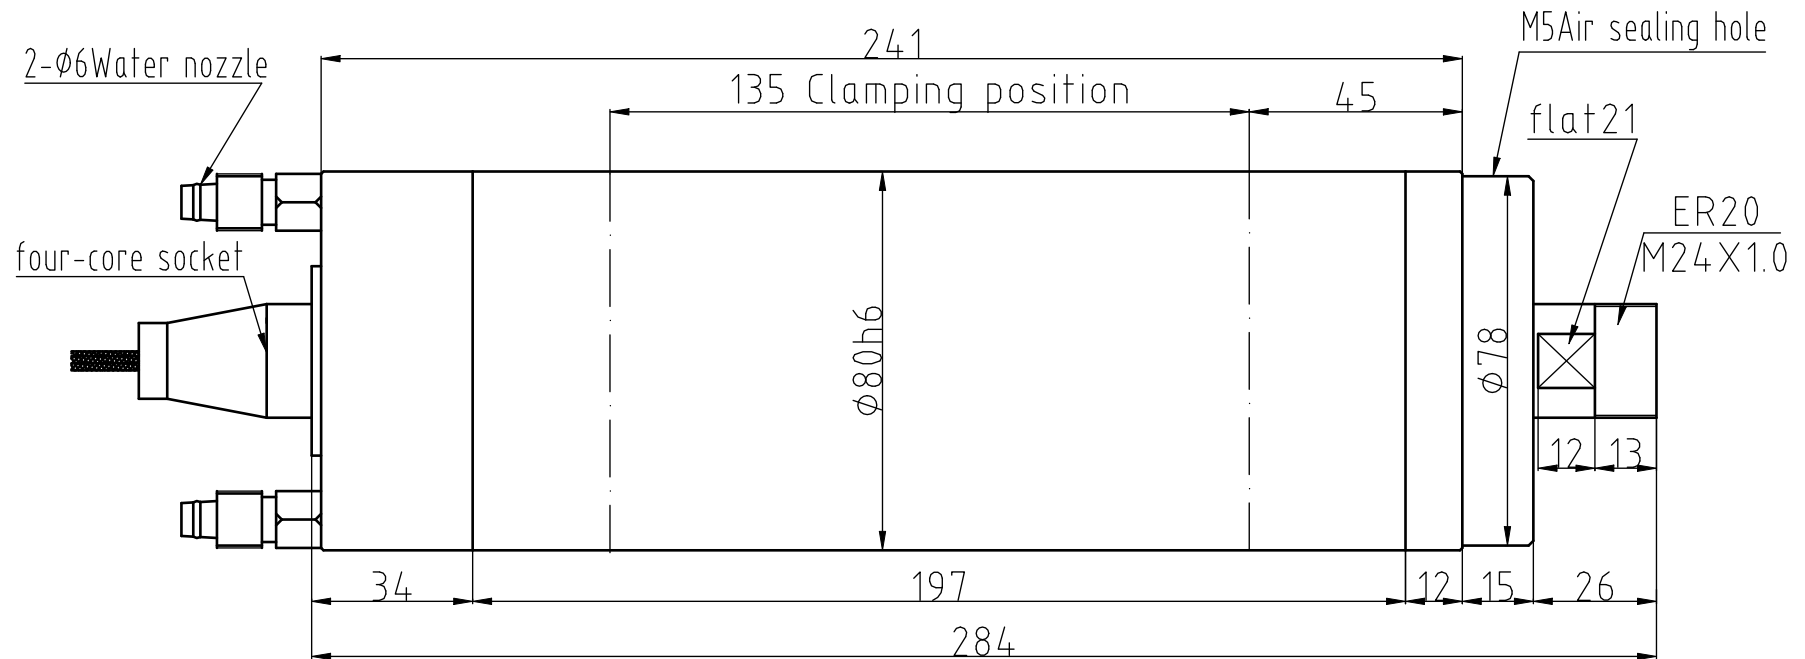

Wiring description

Pins	four-core socket
1	U-converter phase
2	V-converter phase
3	W-converter phase
4	Grounding wire 

GDK80-12-24Z/1.2-2.4

Rated power: 1.2Kw

Rated Voltage: 156-220V

Rated speed: 12000-24000r/min

Rated frequency: 400-800Hz

Rated current: 6.4A

ER Nut: ER-20

Type of bearing: 7005CX2 7002CX2

bearing lubrication: grease lubrication

Weight: 8KG

Rotation direction: Counterclockwise

viewed from the shaft extension

Special warning:

1.The spindle shall be mounted to the clamping position;otherwise it would damage the bearing!

2.The compressed air shall be clean and dry with filtering precision of 0.1 μm! Air pressure: 0.1-0.2MPa.Air sealing shall be normally open.It is recommended to apply two levels of filtering with precisions of 0.5μm/0.1μm, and the filter shall be equipped with automatic drainage.