



## Left view

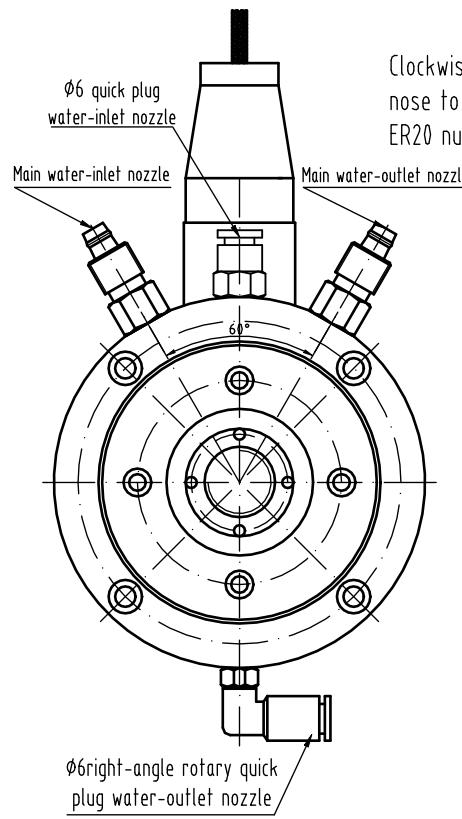


Clockwise rotation viewed from the spindle nose to the spindle at the rear end  
ER20 nut is of left-hand thread

Pins	four-core socket
1	U-converter phase
2	V-converter phase
3	W-converter phase
4	Grounding wire $\ominus$



Counterclockwise rotation viewed from spindle nose to the spindle at the front end

此端为主加工轴端!

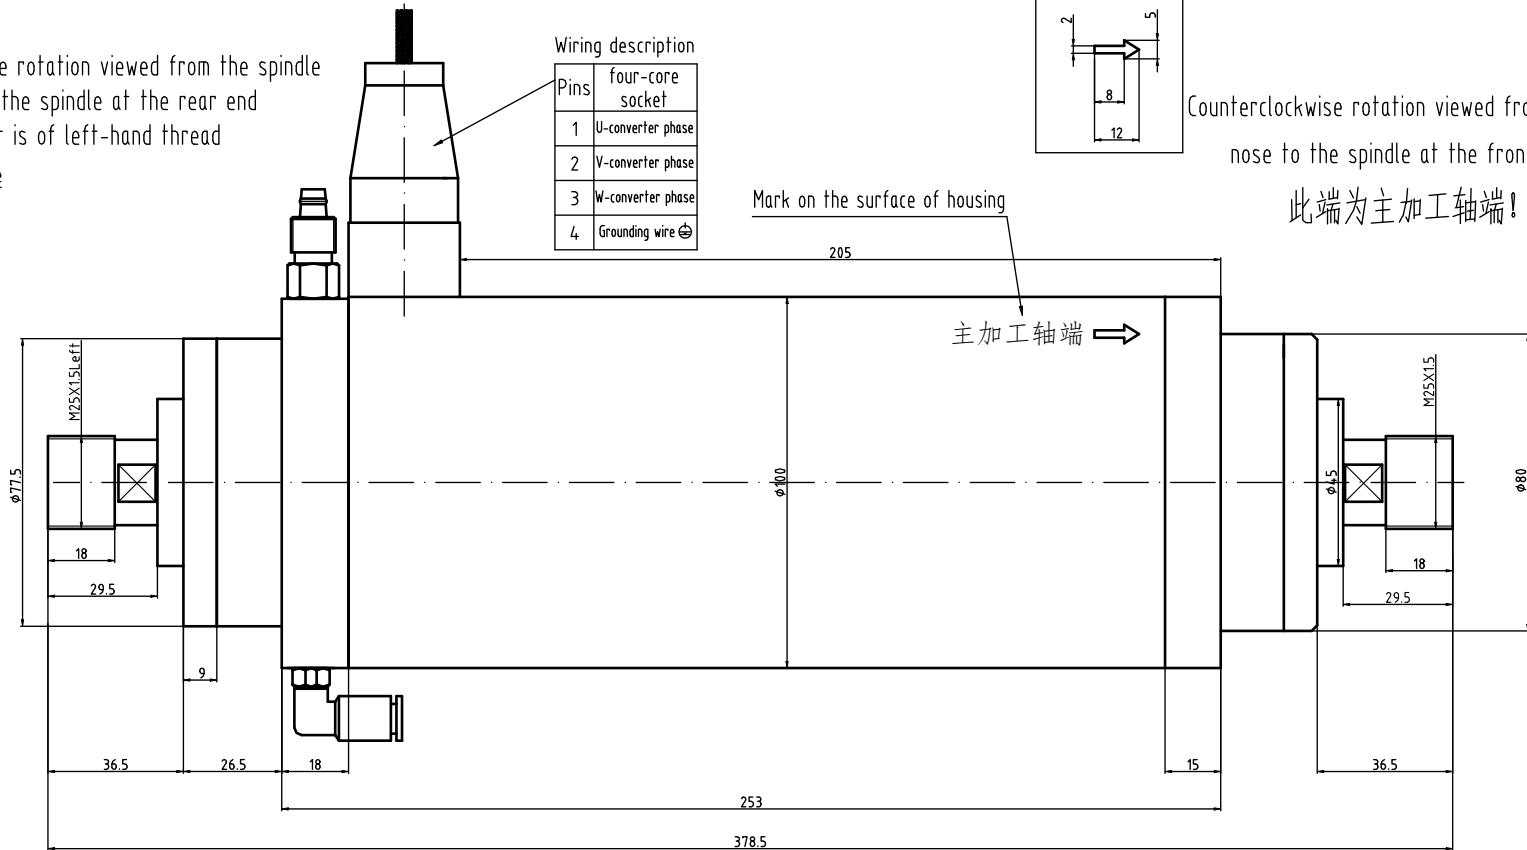

Power: 4.5Kw

Voltage: 380V

Current: 9.0A

Rotational speed: 24000r/min

Frequency: 400Hz

Bearing: 2X7005C/2X7005C

Nut: ER20 and ER20 Left-hand thread

Weight: 13.5KG