

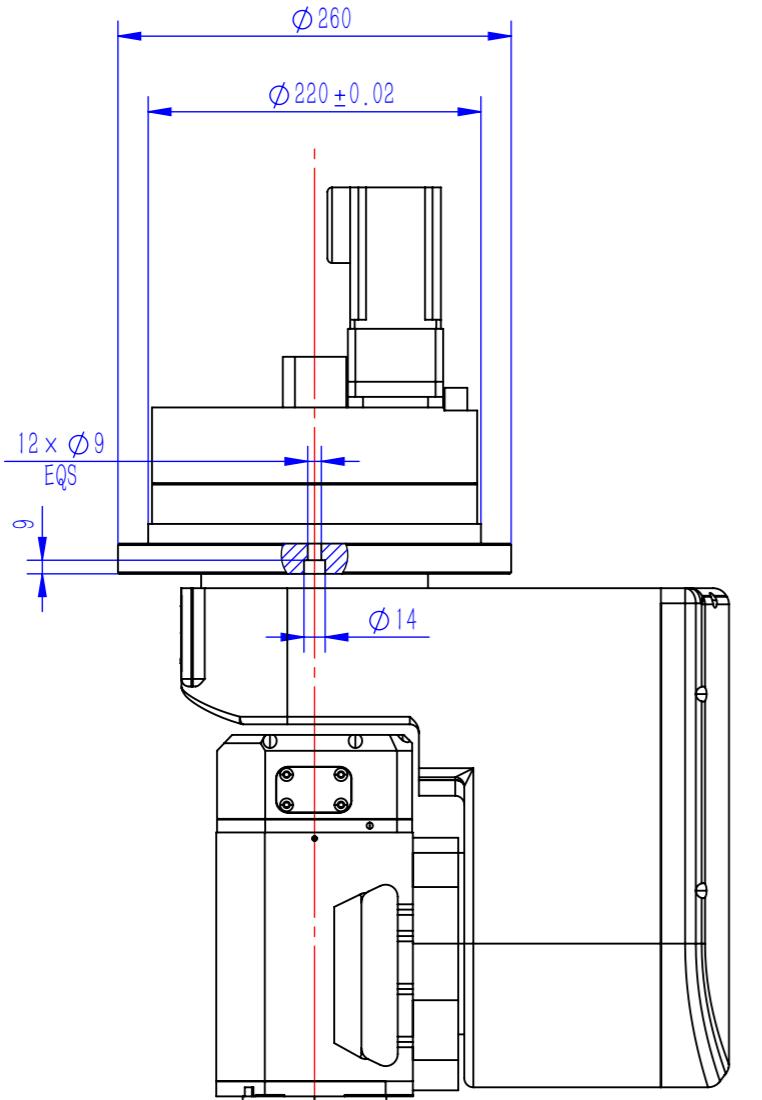


Technical Parameter

C-axis		
Swivel range	(°)	±320
Reduction ratio	1:	203,747
Rated speed	(rpm)	12
No-load speed	(rpm)	15
Maximum continuous torque	(Nm)	250/480
Maximum instantaneous torque	(Nm)	720/1300
Positioning accuracy	(')	±1.5
Repeatability	(')	±1.2
Servo motor	YASKAWA 400W	OPT
	YASKAWA 750W	OPT
A-axis		
Swivel range	(°)	±120
Reduction ratio	1:	128,25
Rated speed	(rpm)	15
No-load speed	(rpm)	23,34
Maximum continuous torque	(Nm)	160
Maximum instantaneous torque	(Nm)	450
Positioning accuracy	(')	±1.5
Repeatability	(')	±1.2
Servo motor	YASKAWA 400W	OPT
Spindle		
GDL65-HSK63F-24Z/12-4		OPT
GDL65Y-HSK63F-15Z/18		OPT

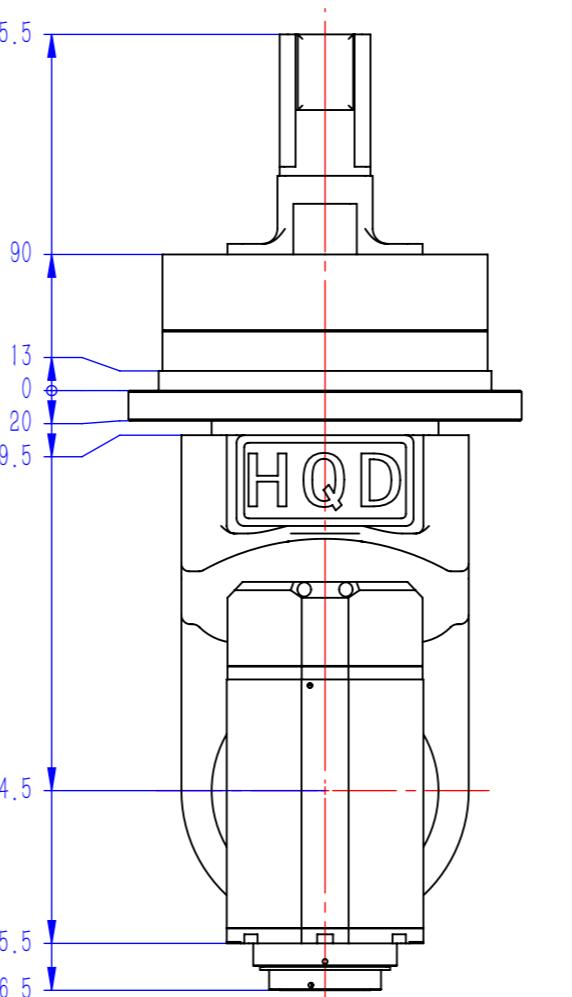

Function	Pipe
Air seal	$\varnothing 6$
Tool out	$\varnothing 6$
Spindle coolant in	$\varnothing 8$
Spindle coolant out	$\varnothing 8$

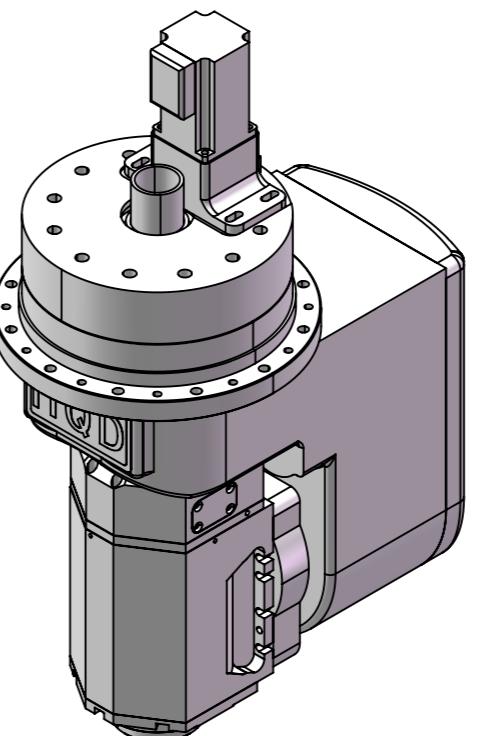