

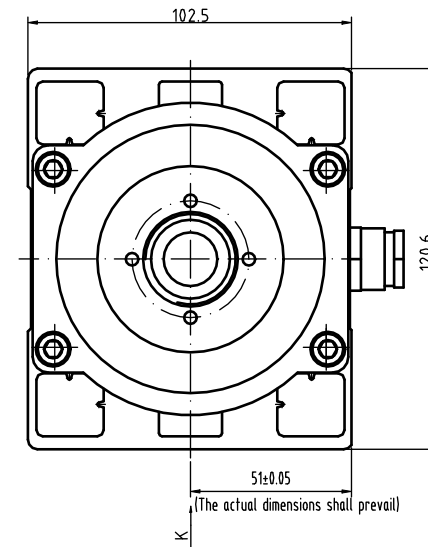


GDR51-18Z/2.2S Y380V/Δ220V Outline drawing

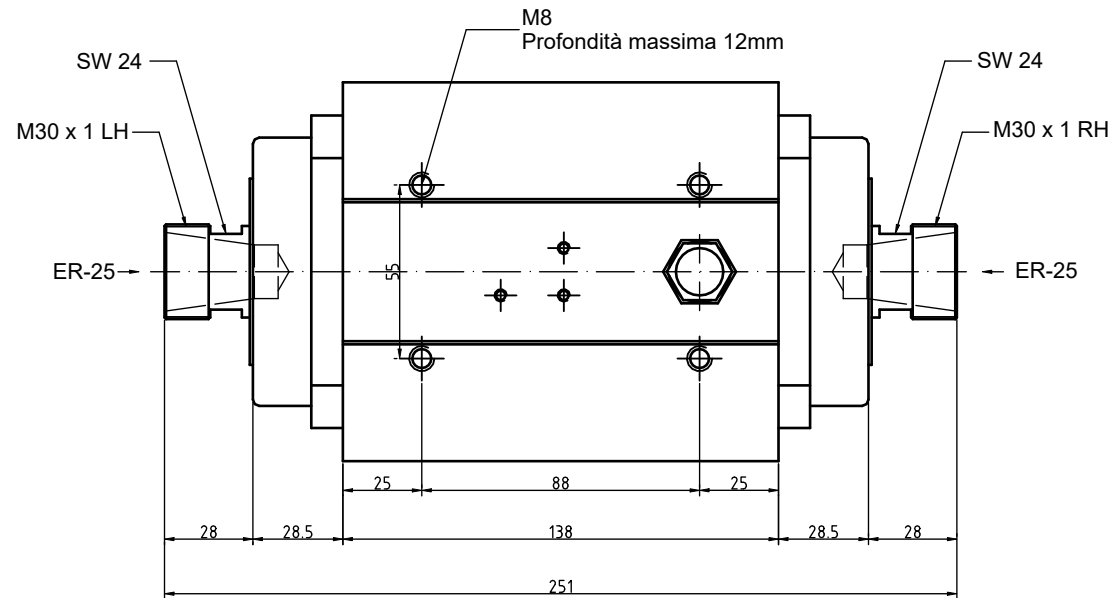

Note: 9 lead wires, 6-UL1330-18#, including 2 wires for each red, brown, and blue with size of 2.5m, and 1 yellow-green earth wire of 2.5m, and 2 PTC outlet wires of 2.5m.
Apply 2.5m of PVC silicone fiberglass sleeve with diameter $\phi 15$.

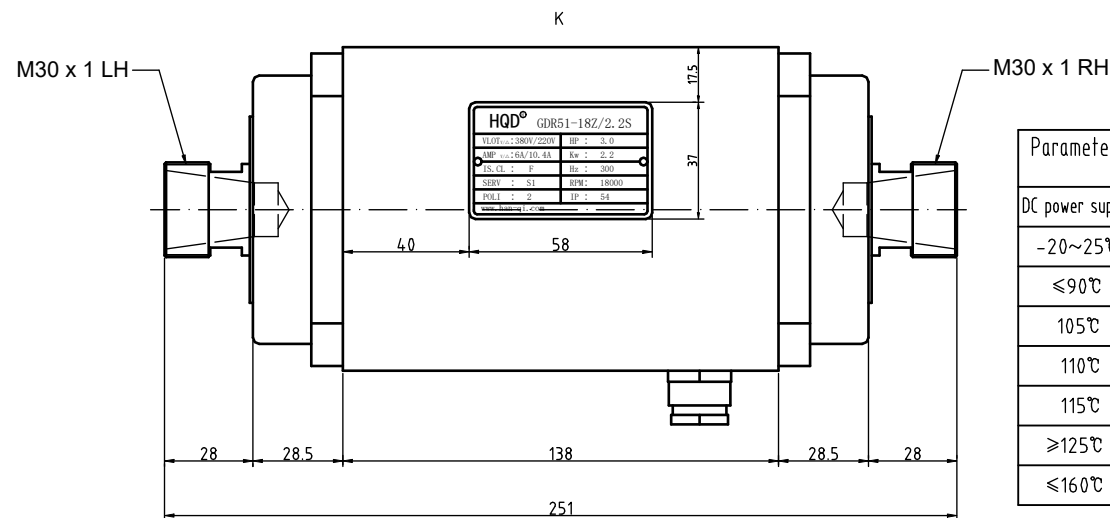

Parameters of PTC single-core thermistor	
DC power supply	Maximum DC25V/100mA
-20~25℃	≤100Ω
≤90℃	≤250Ω
105℃	≤550Ω
110℃	Rated function temperature
115℃	≥1330Ω
≥125℃	≥4KΩ
≤160℃	Maximum storage temperature

