
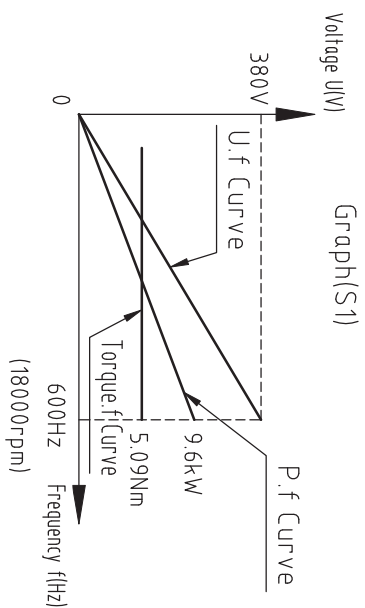
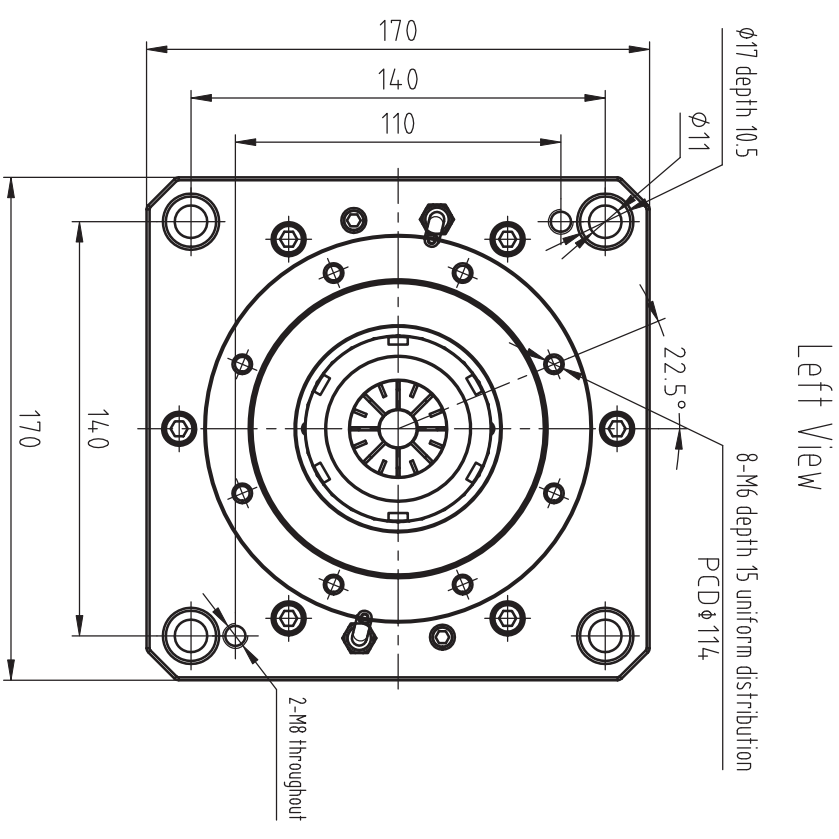
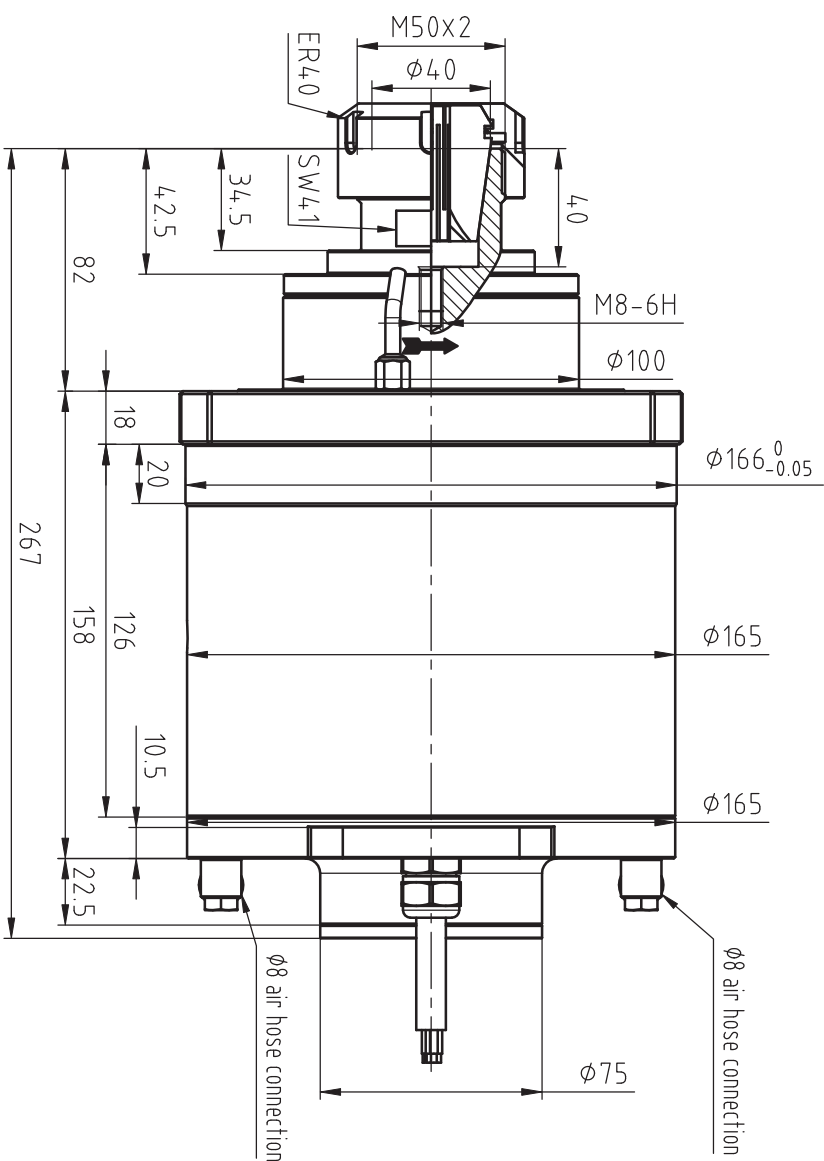


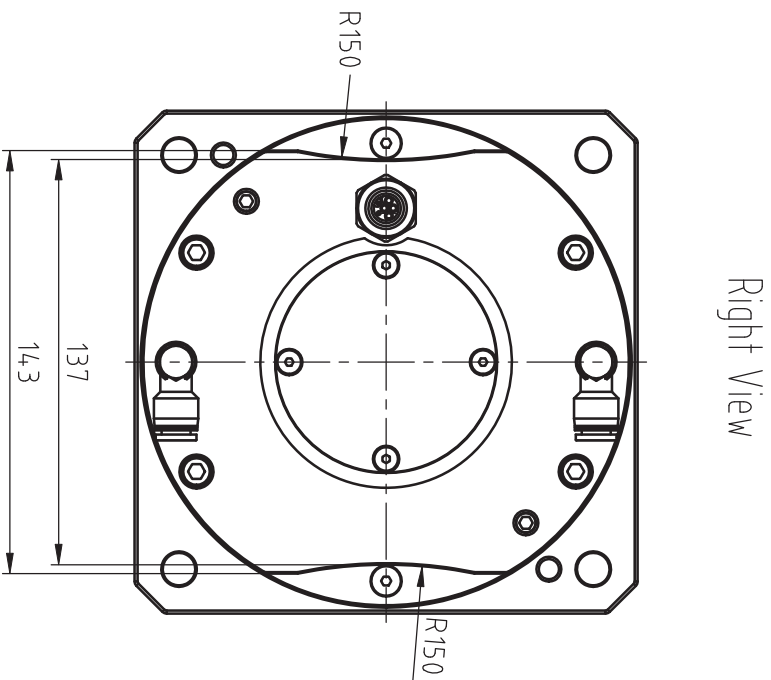

Technical Specification

1. Lead wire length 600mm;

借 (通) 用		Model: GDF166-18Z/9.6			
件 登 记					
旧底图总号		Rated Voltage	Y380V	Rated power	9.6kW
底图总号		Rated Frequency	600Hz	Rotational speed	1800rpm
		Rated Torque	5.09N·m	Number of pole	4
参 字		Working System	S1	Insulation Level	F
日 期		Cooling Method	Air-cooled	Lubricating Method	Grease
		IP	54	Weight	21kg
档案员	日 期	Nut	ER40-M50×2		

Interface Description		
Power Lead-out Wire 	a	U-phase
	b	V-phase
	c	W-phase
	d	Yellow-Green Grounding
	e	PTC thermistor
f	PTC thermistor	
Cooling Air Intake	2-Ø8 Air Hose (0.4MPa)	

Note: The cooling air also serves as an air curtain. The air source must be clean and dry.

								Air-cooled Electric Spindle				Jiangsu HOD Spindle Motor Co., Ltd.			
标记	处数	分区	更改文件号	签名	年、月、日							Outline Drawing			
设计			标准化												
审核										GDF166-18Z/9.6-00-1					
工艺			批准												