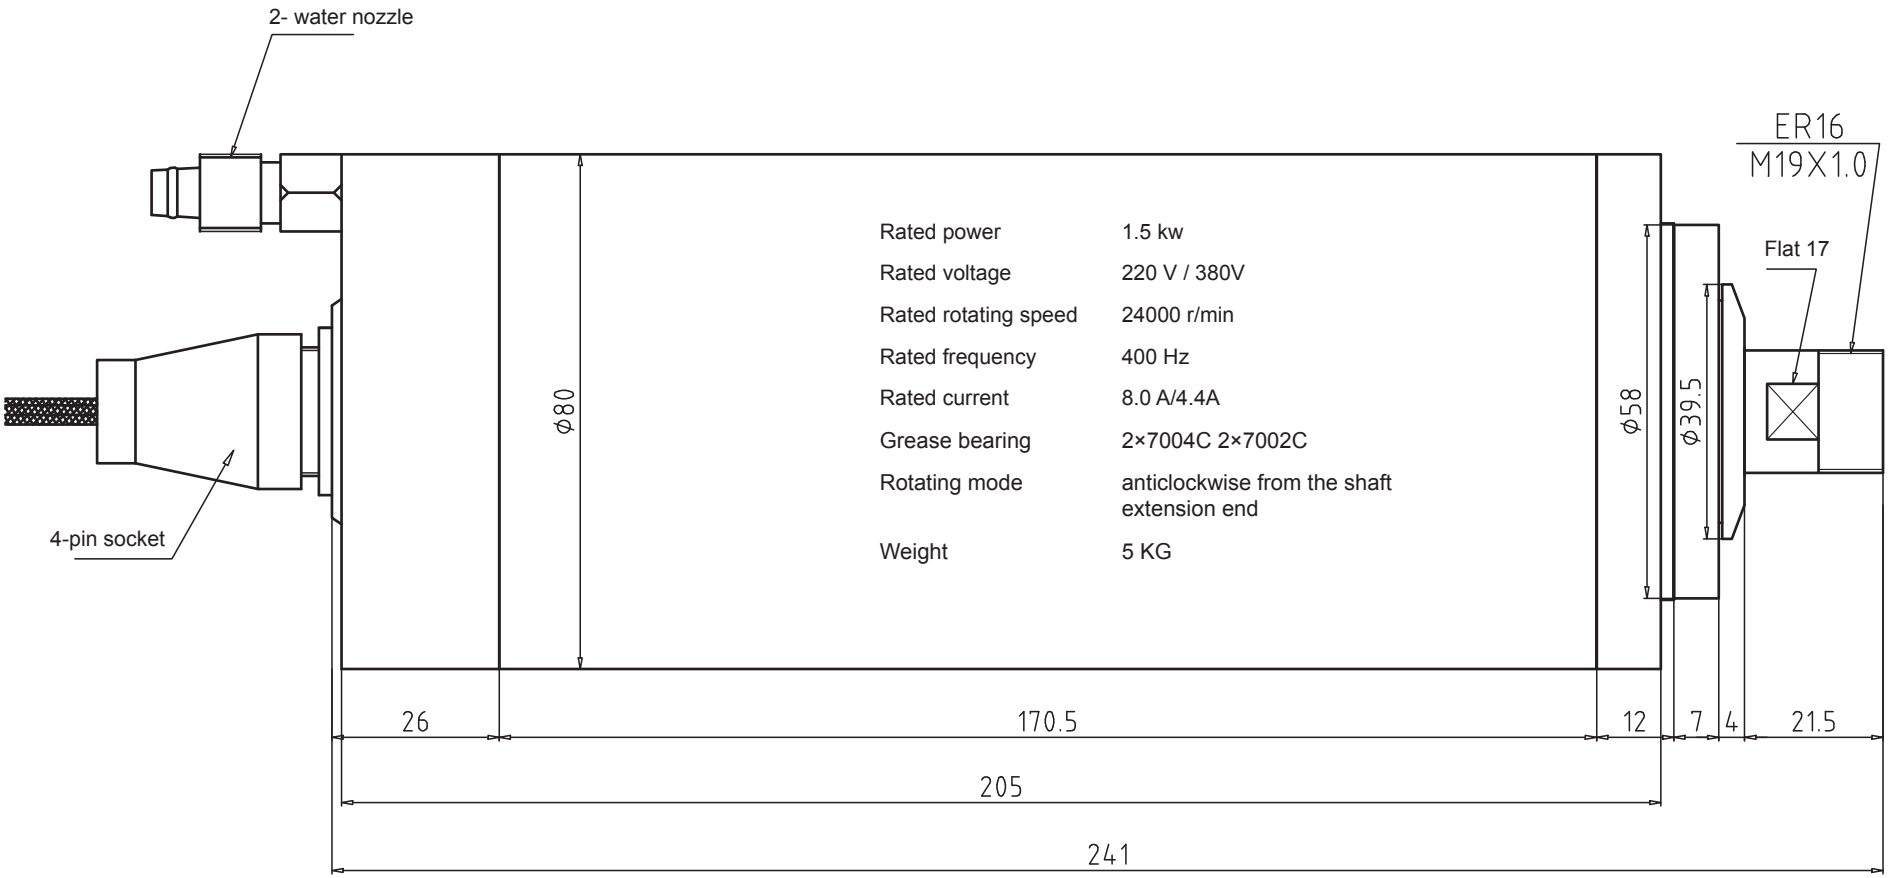

Rated power	1.5 kw
Rated voltage	220 V / 380V
Rated rotating speed	24000 r/min
Rated frequency	400 Hz
Rated current	8.0 A/4.4A
Grease bearing	2×7004C 2×7002C
Rotating mode	anticlockwise from the shaft extension end
Weight	5 KG

Wiring description

Pin	4-pin socket
1	U frequency converter phase
2	V frequency converter phase
3	W frequency converter phase
4	Wiring ground ⏚

Marks	Number of places	Zoning	Modified document number	Signature	Date			Outline diagram
Designed by			Standardized by			Phase mark	Weight	Scale
Reviewed by								GDZ-17B
Processed by			Approved by			Total page(s)	Page	