


# GDF46-18Z/3.5 380V Profile drawing of junction box

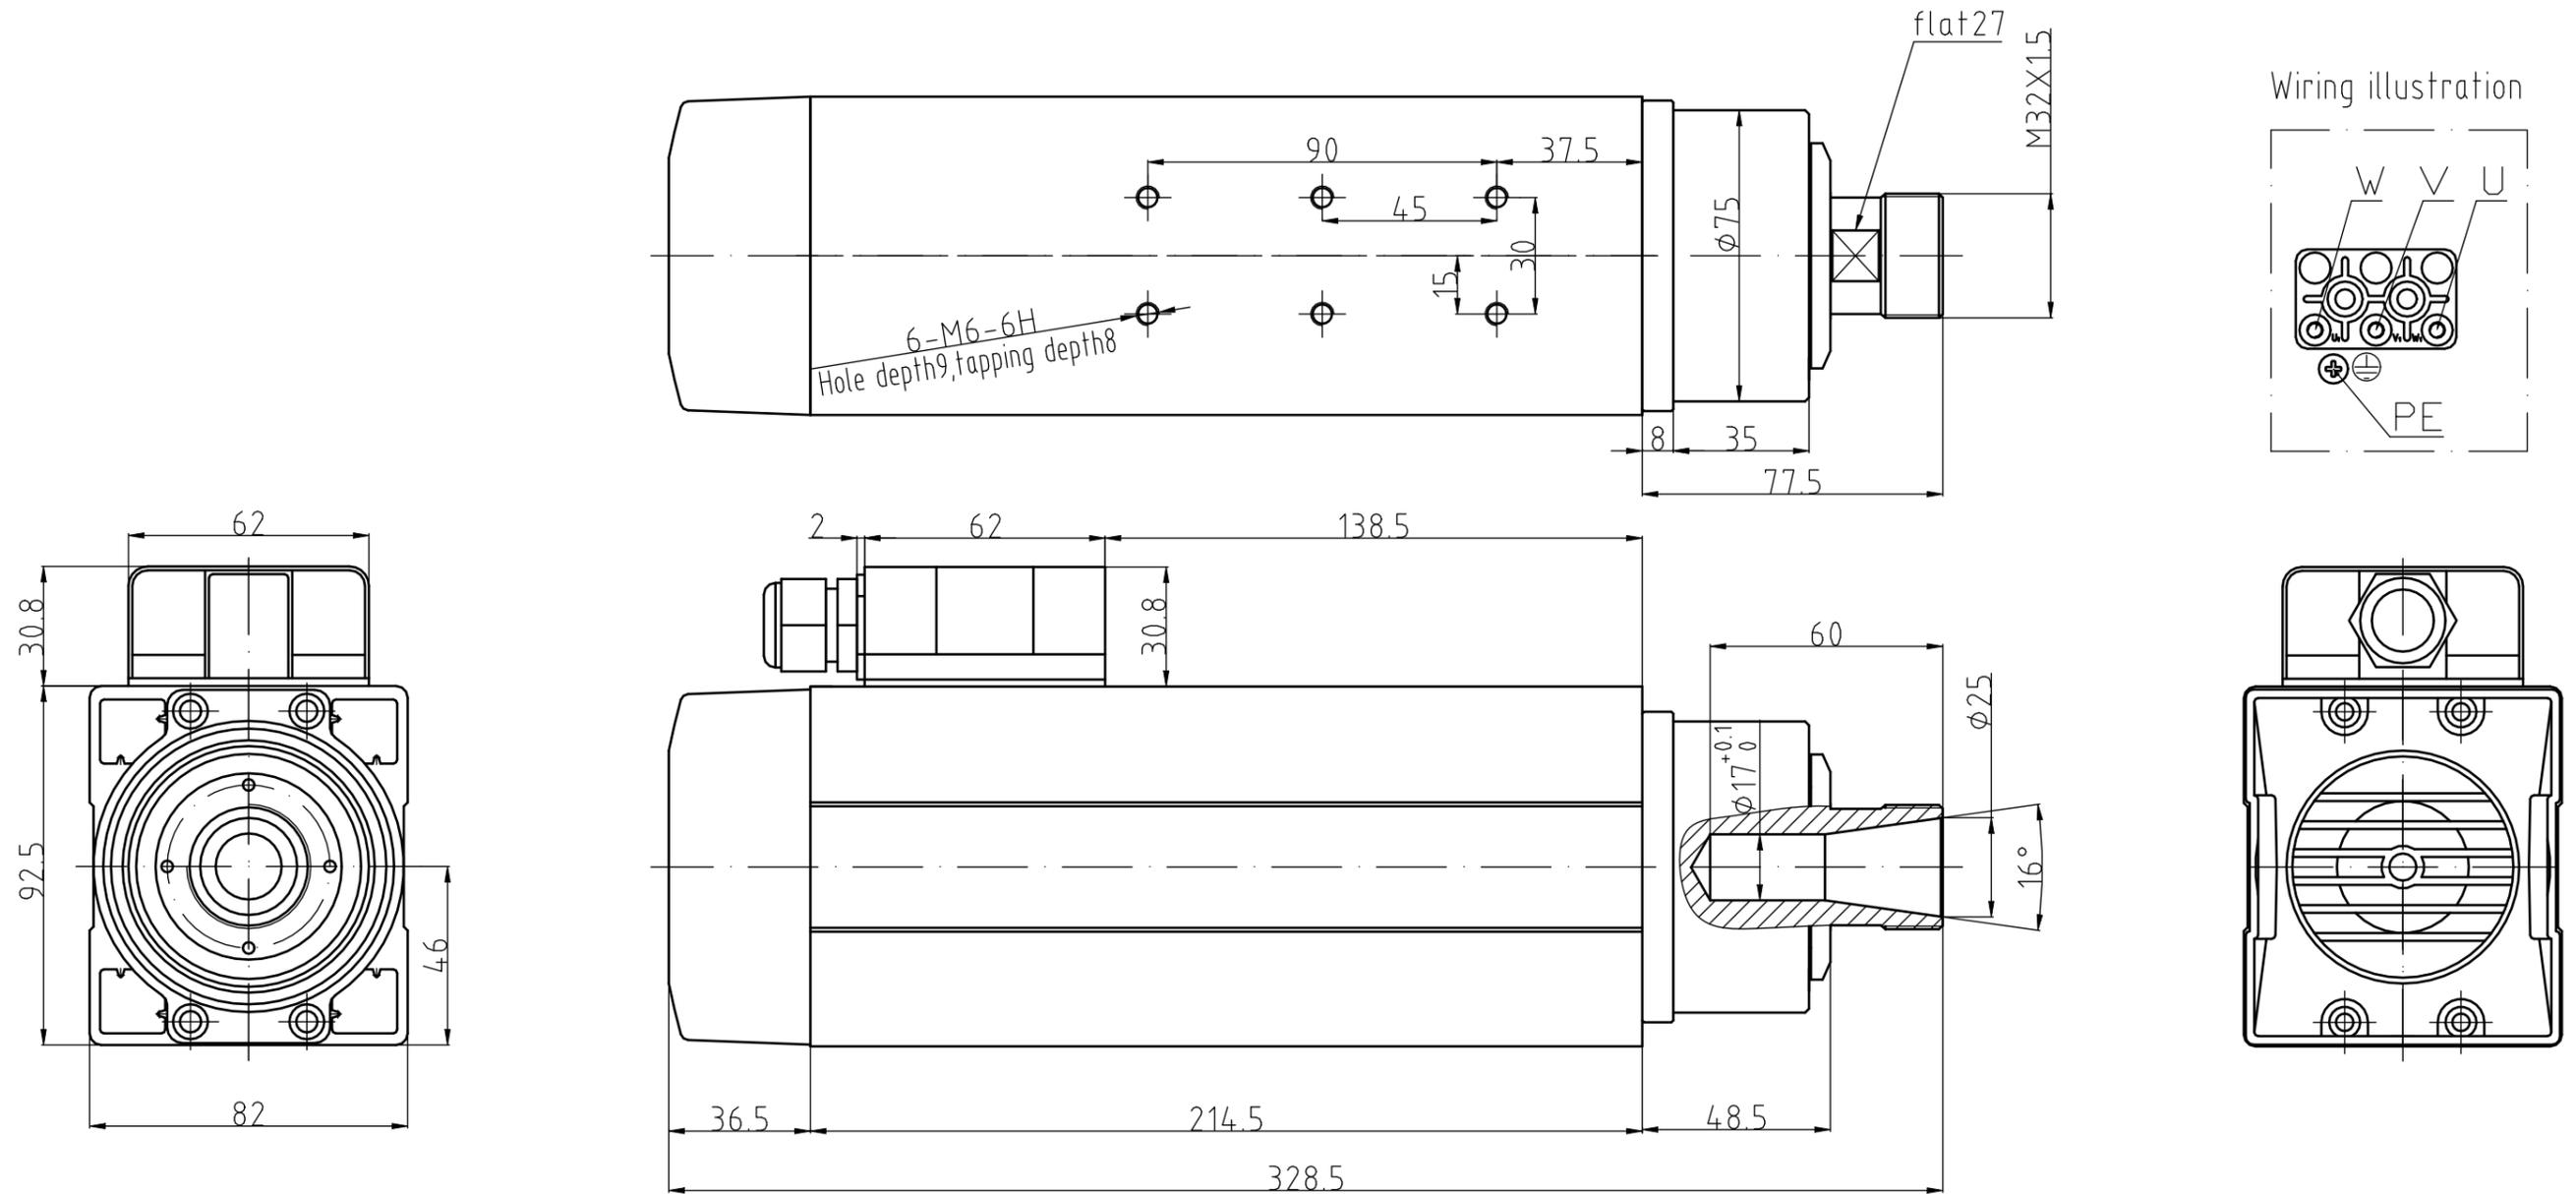

GDF46-18Z/3.5  
 Power 3.5kw  
 Voltage 380V  
 Current 7.0A  
 Frequency 300Hz  
 Rotational speed 18000r/min

Weight:8KG  
 ER Nut: ER25  
 Cooling method: Air cooling  
 Lubrication method of bearings:grease lubrication  
 Angular contact ball bearing with high precision:  
 2X7007C P4/2X7002C P4  
 Rotation direction:Counterclockwise viewed from the  
 shaft extension

Notice:It shall apply thread adhesive or spring washer to prevent loosening while mounting fastening screw!