


GDF46-18Z/3.5 220V Profile drawing of junction box

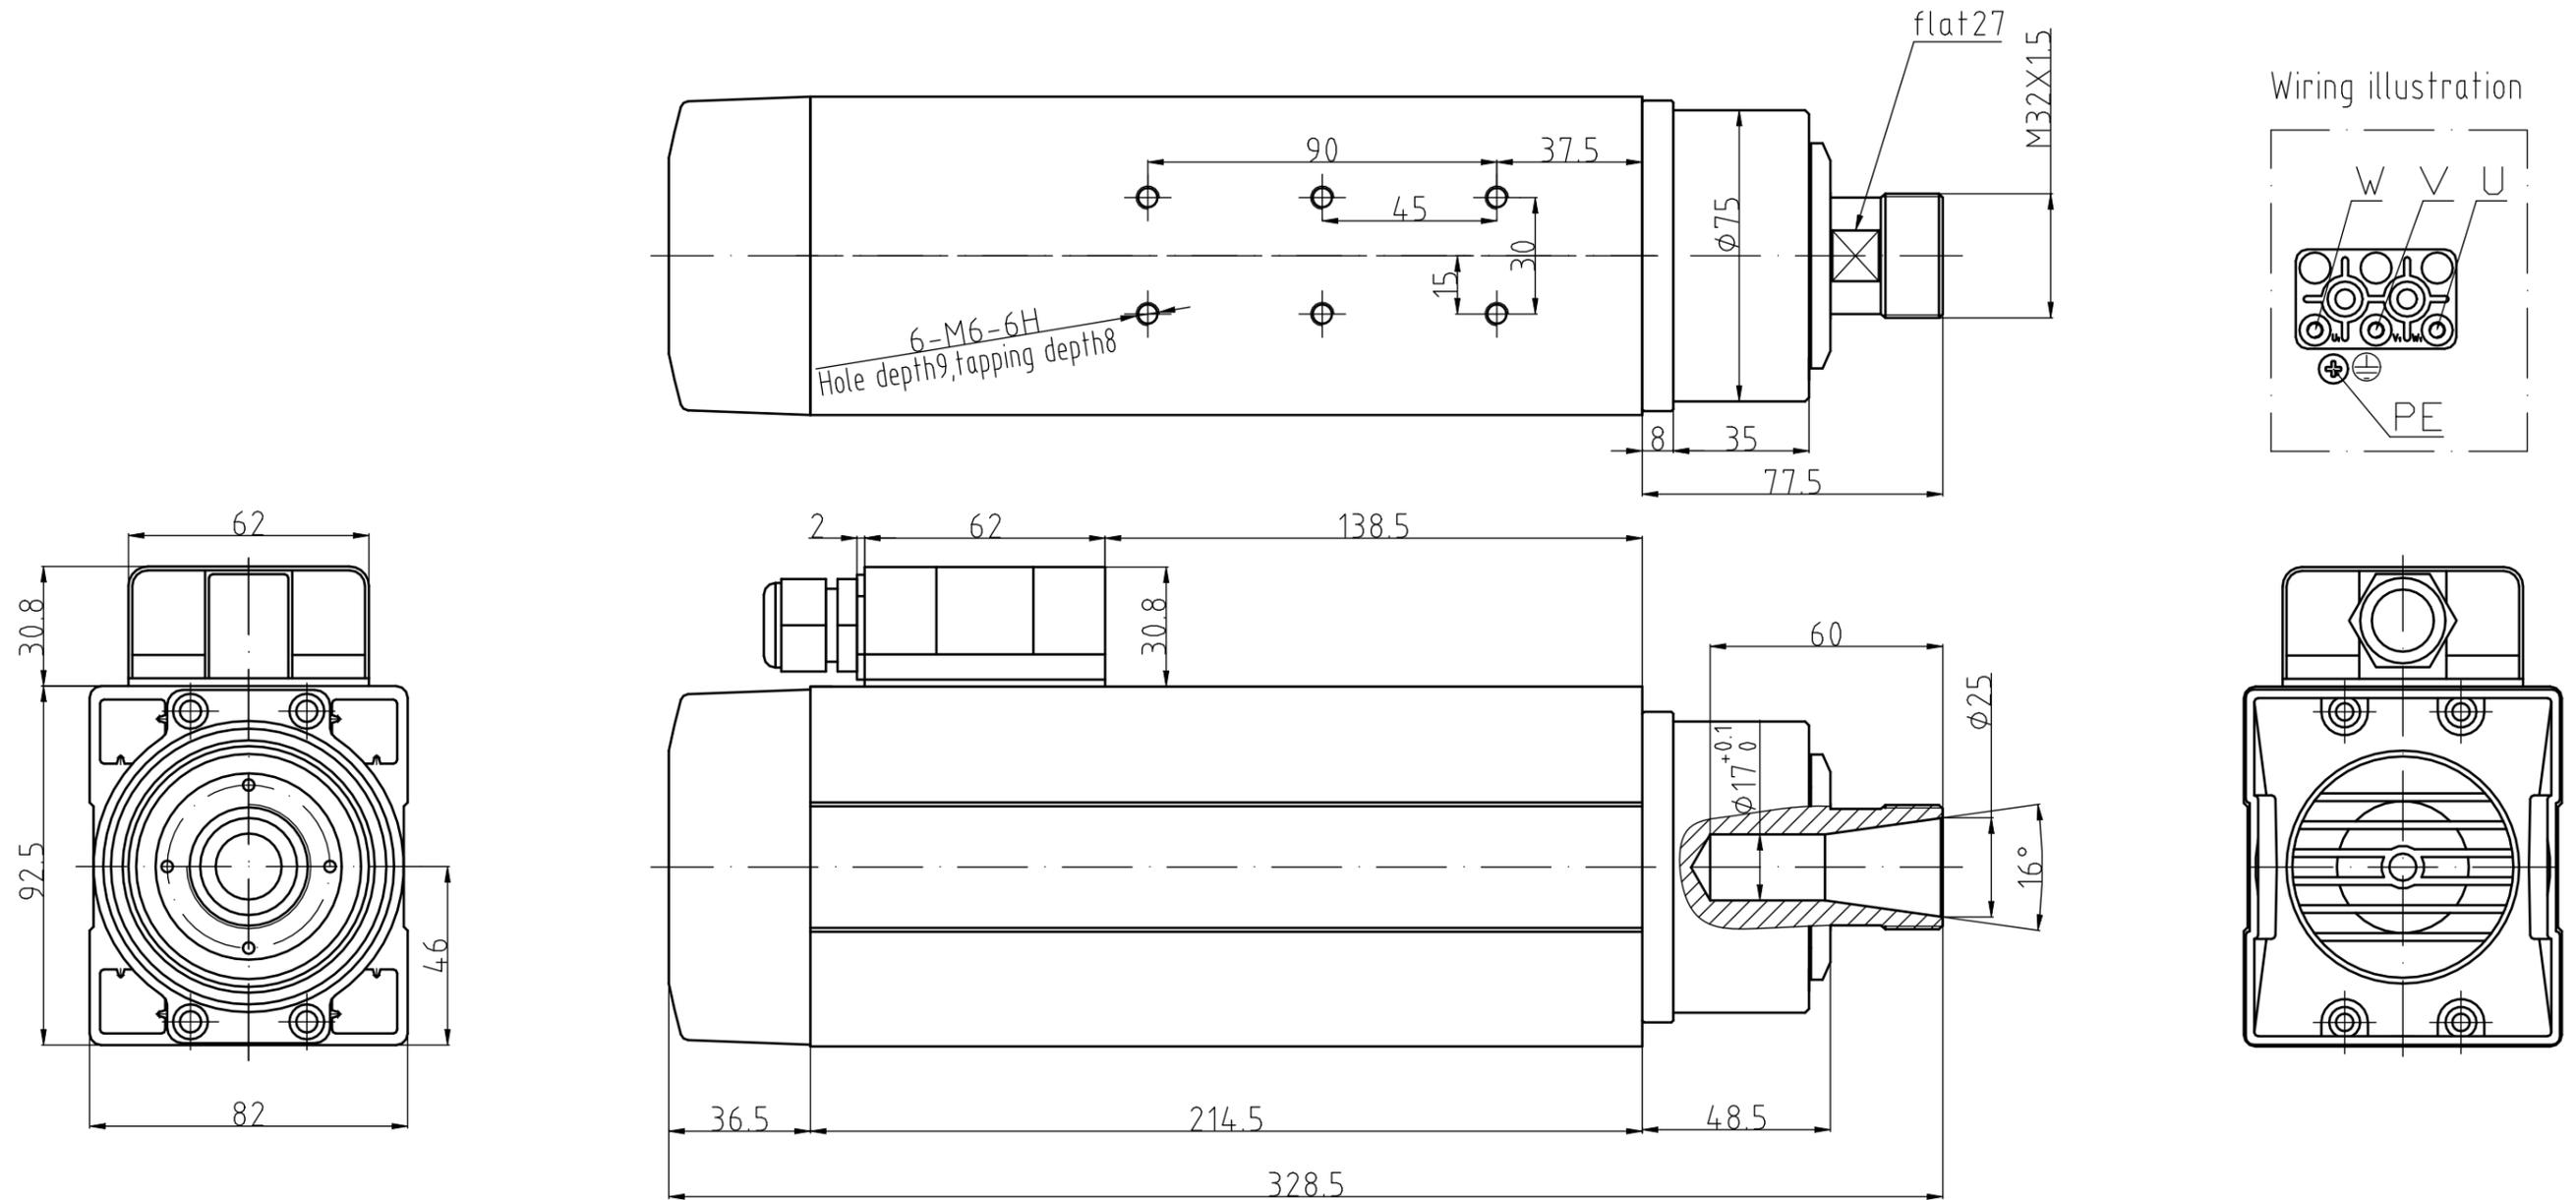

GDF46-18Z/3.5
 Power 3.5kw
 Voltage 220V
 Current 12.0A
 Frequency 300Hz
 Rotational speed 18000r/min

Weight:8KG
 ER Nut: ER25
 Cooling method: Air cooling
 Lubrication method of bearings:grease lubrication
 Angular contact ball bearing with high precision:
 2X7007C P4/2X7002C P4
 Rotation direction:Counterclockwise viewed from the
 shaft extension

Notice:It shall apply thread adhesive or spring washer to prevent loosening while mounting fastening screw!