


GDF60-18Z/5.5 380V Outline drawing

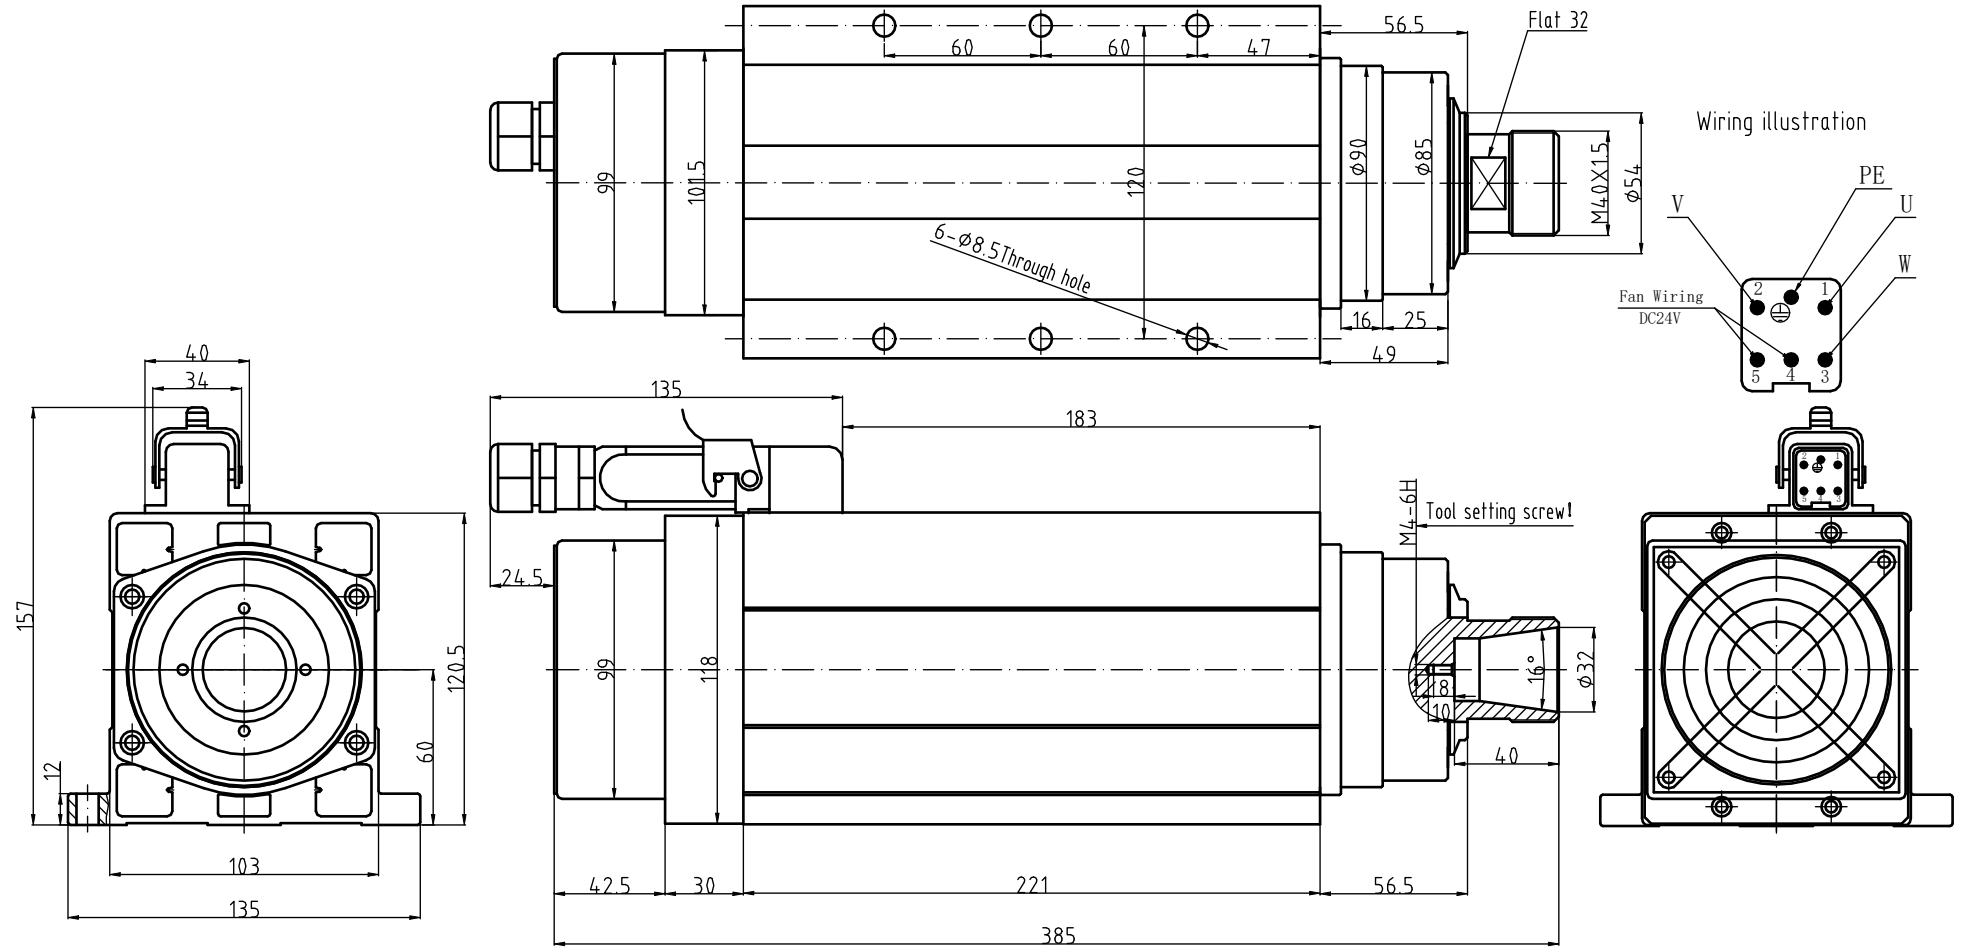

GDF60-18Z/5.5
Power 5.5kw
Voltage 380V
Current 12.5A
Frequency 300Hz
Rotational speed 18000r/min

Weight:13KG
ER Nut: ER32
Cooling method: DC24V DC fan
Lubrication method of bearings:grease lubrication
Angular contact ball bearing with high precision:
2X7008C P4/2X7002C P4
Rotation direction:Counterclockwise viewed from the
shaft extension

Notice:It shall apply thread adhesive to prevent loosening while
mounting fastening screw!