


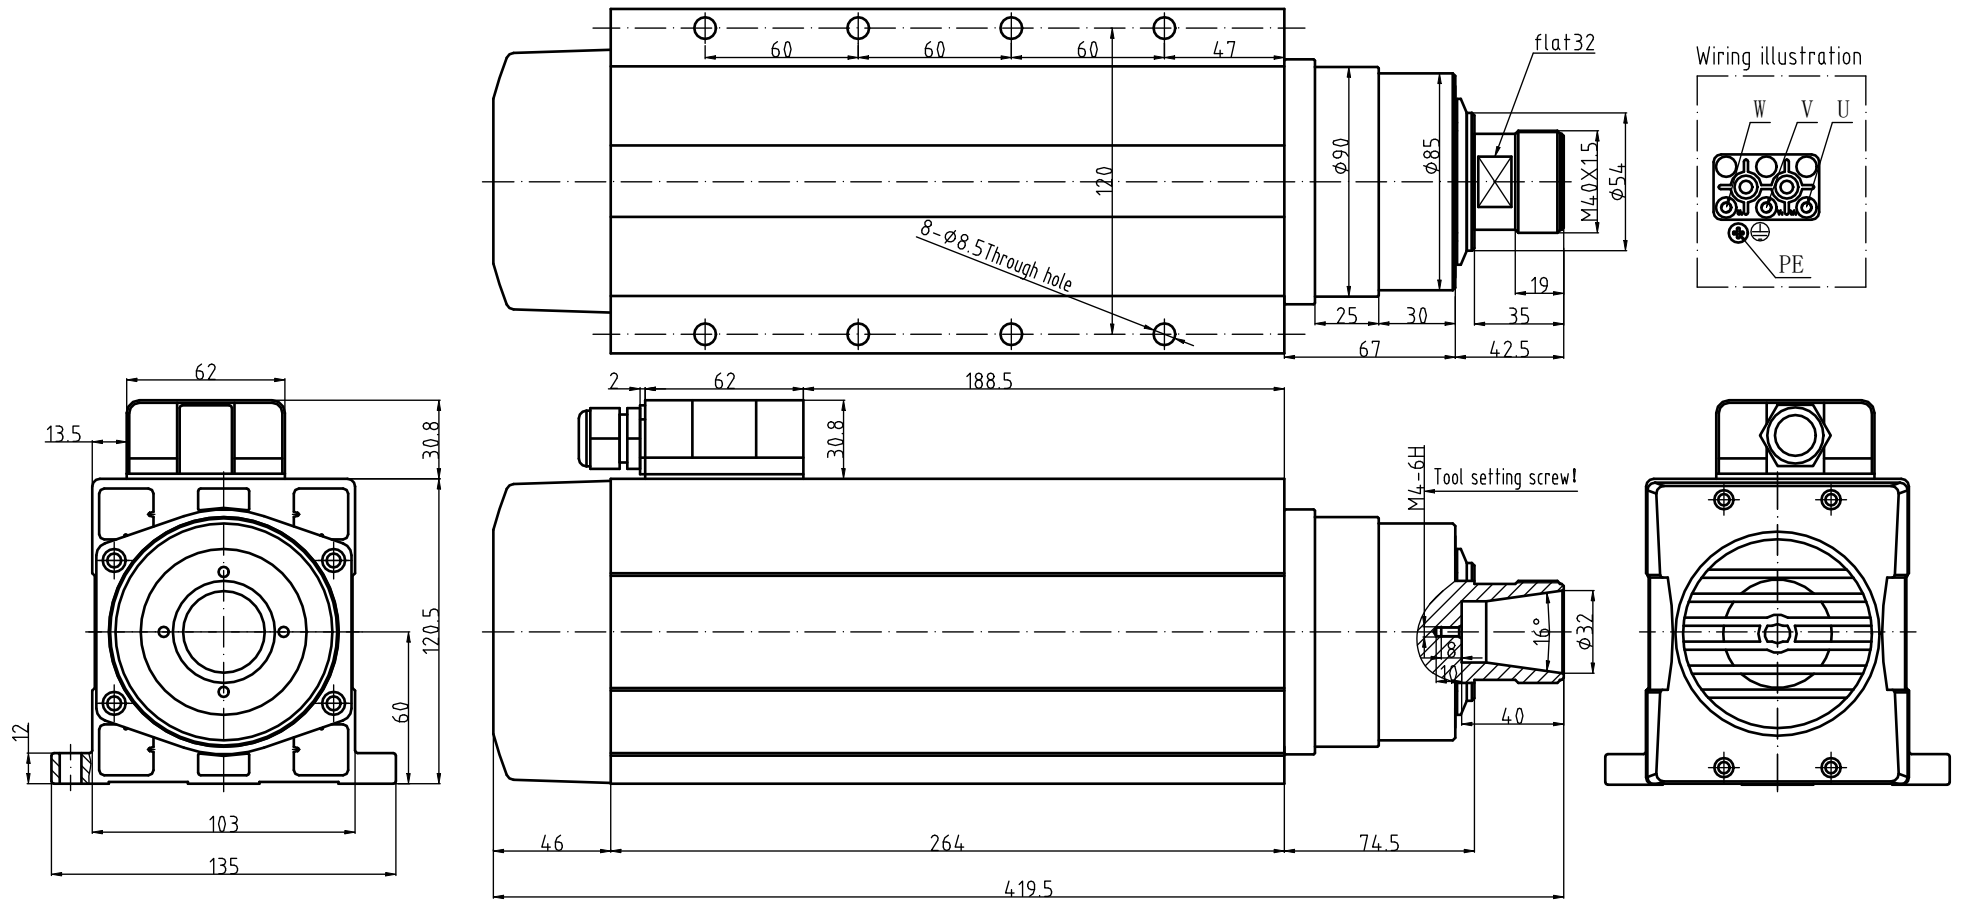

GDF60-18Z/9.0
 Power 9.0kw
 Voltage 380V
 Current 19.0A
 Frequency 600Hz
 Rotational speed 18000r/min
 Number of pole: 4P

Weight:17KG
 ER Nut: ER32
 Cooling method: Air cooling
 Lubrication method of bearings:grease lubrication
 Angular contact ball bearing with high precision:
 2X7008C P4/2X7004C P4
 Rotation direction:Counterclockwise viewed from the
 shaft extension

Notice:It shall apply thread adhesive or spring washer to prevent
 loosening while mounting fastening screw!