


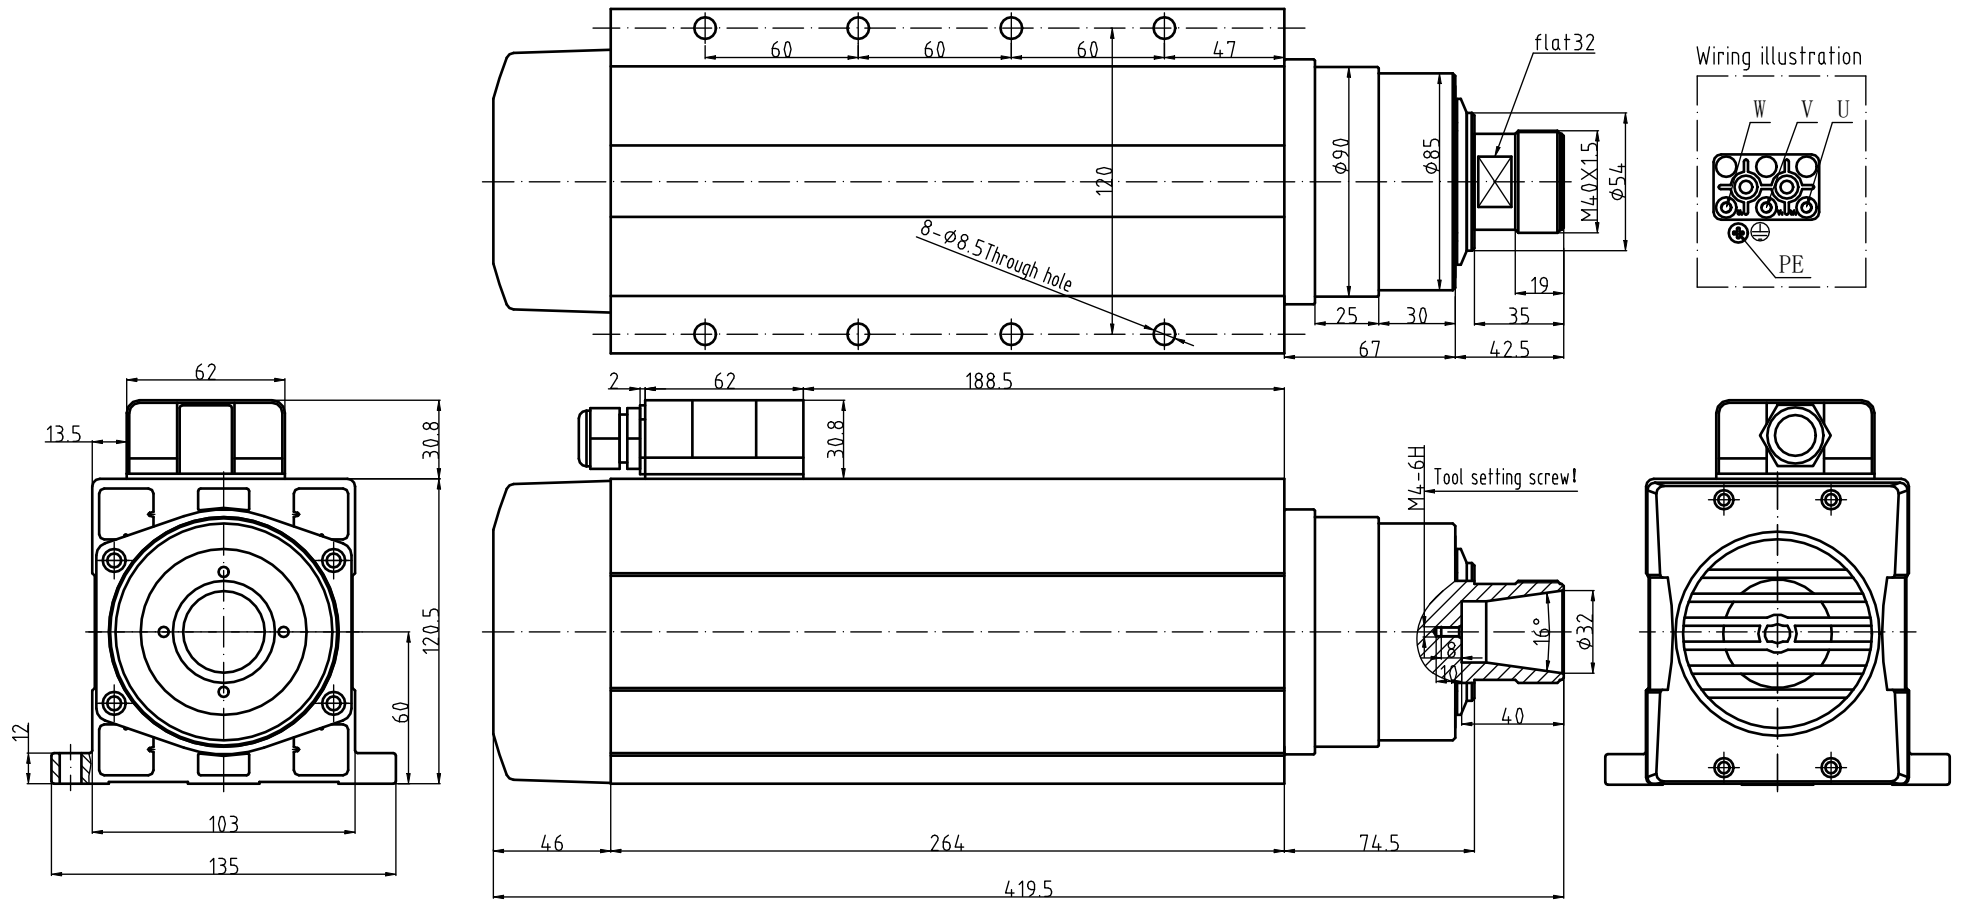

GDF60-18Z/9.0  
 Power 9.0kw  
 Voltage 220V  
 Current 31.5A  
 Frequency 600Hz  
 Rotational speed 18000r/min  
 Number of pole: 4P

Weight:17KG  
 ER Nut: ER32  
 Cooling method: Air cooling  
 Lubrication method of bearings:grease lubrication  
 Angular contact ball bearing with high precision:  
 2X7008C P4/2X7004C P4  
 Rotation direction:Counterclockwise viewed from the  
 shaft extension

Notice:It shall apply thread adhesive or spring washer to prevent  
 loosening while mounting fastening screw!